


# KSPpz - 5

INTERFERENCE SUPPRESSION CAPACITORS OF X2 CLASS

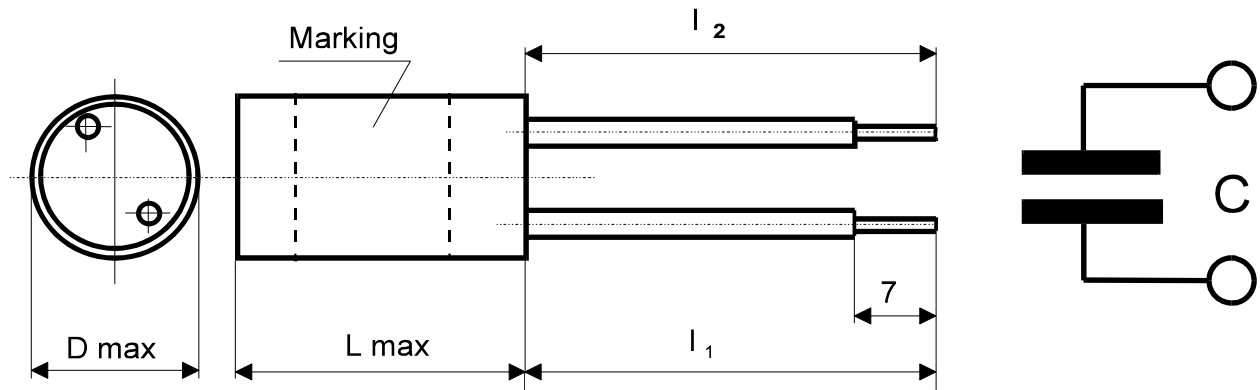

## TECHNICAL DATA

Climatic category	40/085/21/C
Rated capacitance	See table
Capacitance tolerance	$\pm 20\%$
Rated voltage ( $U_R$ )	250V AC
Insulation resistance ( $R_{ins}$ )	$\geq 6000 \text{ M}\Omega$
Specifications:	WT-80/1-KSPpz

**KSPpz-5 capacitors have VDE certificate EN 60384-14.**

Version	Capacitance	Resonant frequency	Dimensions				Weight
			$D_{max}$	$L_{max}$	$l_1$	$l_2$	
	$\mu\text{F}$	MHz	mm				
01	0.025	$\geq 2.8$	13.0	35.5	55.0	55.0	7
02	0.070	$\geq 2.0$	14.5	41.0	45.0	80.0	17
03	0.100	$\geq 1.4$	15.5	35.5	65.0	65.0	17
04	0.150	$\geq 1.0$	16.5	41.0	80.0	80.0	19
06	0.070	$\geq 2.0$	14.5	41.0	140.0	160.0	17
07	0.050	$\geq 2.0$	13.0	35.5	55.0	55.0	15
08	0.1	$\geq 1.4$	15.5	35.5	140	140	

**MIFLEX S.A.**  
 ZAKŁADY PODZESPOŁÓW RADIOWYCH  
 99-300 KUTNO, UL. GRUNWALDZKA 3, POLAND  
 Tel.: 0048 24 355 11 00-02  
 Fax: 0048 24 355 11 88  
 E-mail: miflex@miflex.com.pl

Revision date: 05.05.2008.