

Insulator material
PBT, UL94V-0

Contact material
Brass

Plating
Ni, Au / Sn

Contact resistance
20mΩ max

Insulation resistance
1000MΩ min



Current rating
1,A

Operating temperature
-40°C - +105°C

Operating voltage
250V AC

Test voltage
1000V AC

Packing
Tray packing

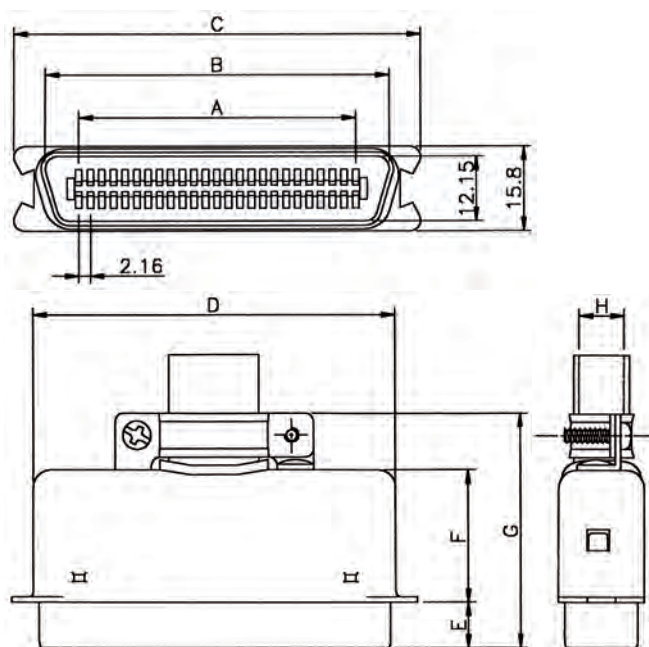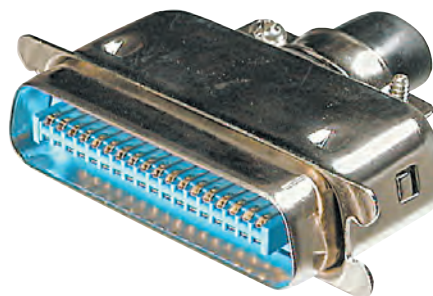

Dimensions				
No. of contacts	A	B	C	D
36	36.72	49.30	61.80	53.20
50	51.84	64.40	77.00	68.10

Dimensions				
No. of contacts	E	F	G	H
36	7.90	22.60	40.50	11.5
50	8.60	24.90	44.30	12.5

Ordercode

No. of contacts

36 / 50

M - Male

A - 57 / xx M

Please replace „x“ with appropriate option