


Pitch (mm)	1,27
No of contacts	28
Material contact	Phosphor bronze
Material insulator	High temp. thermoplast UL94V-0
Rated current	1,0 A
Rated voltage	100 V _{RMS} / V _{DC}
Withstand voltage	600 V _{RMS} for 1 minute
Operating temperature	-40°C to +85°C
Max. processing temper.	260°C for 10 seconds
Packaging	Tube
A	17,78
B	17,78
C	7,62
D	7,62
E	20,30
F	15,24

PLCC sockets with SMD terminations (acc. JEDEC MO-047 / MO-052) offering the same PCB layout as the IC package.

Standard Variation.

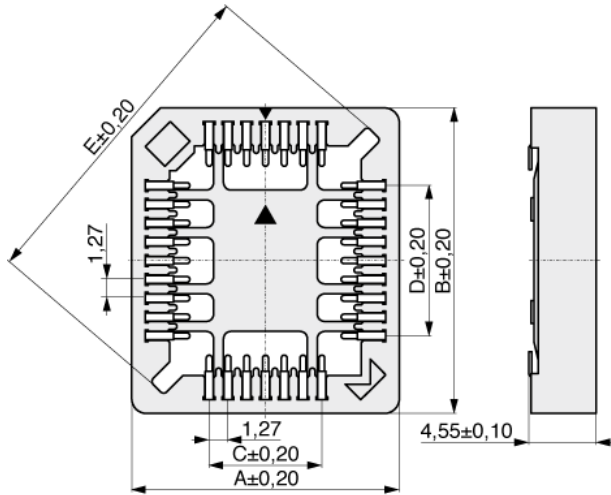

Footprint:

