

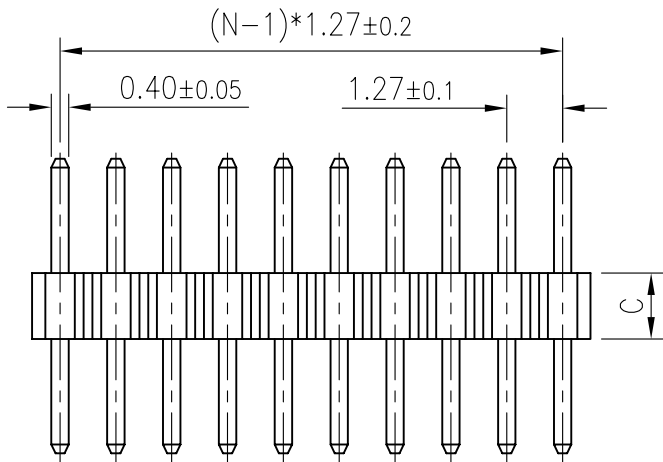


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 08/11/07'	~	

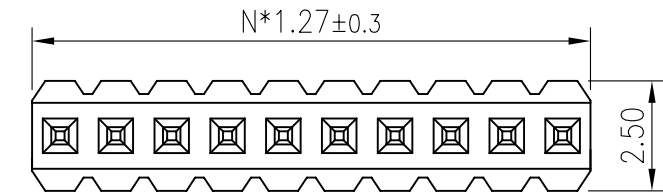

NOTES:

- MATERIAL
 - INSULATOR:THERMOPLASTIC(UL 94V-0).
 - CONTACT MATERIAL:COPPER ALLOY.
- SPECIFICATION
 - CURRENT RATING:1.0 Amp.
 - INSULATION RESISTANCE:500MΩ Min.
 - DIELECTRIC WITHSTANDING:300VAC.
 - CONTACT RESISTANCE:20mΩ Max.
 - OPERATING TEMPERATURE:-40°C TO+105°C.
- PRODUCT NUMBER CODE:

DS1031-01 - X X X X X X X X


- DIM.A B TYPE
1: TYPE 1
- HOUSING HEIGHT(DIM. C)
1: 1.00mm
2: 1.50mm
3: 2.00mm
- MOUNTING TYPE
V: VERTICAL TYPE
- HOUSING COLOR
B:BLACK
- CONTACT PLATING
8: FULL GOLD FLASH
- CONNECTOR TYPE
P:PLUG
- No.OF CONTACTS
1*1-1*40

N:NUMBER OF CONTACTS

18		
19		
20		
21		
22		
23		
24		
25		

10		
11		
12		
13		
14		
15		
16		
17		

TYPE	DIM A	DIM B
1	2.60	2.60
2		
3		
4		
5		
6		
7		
8		
9		

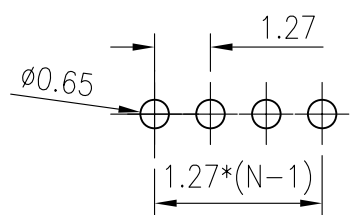

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	1.27mm PITCH PIN HEADER SINGLE ROW STRAIGHT
X.	±0.60	X.	±5'	UNITS	mm	SHEET SIZE	A4
.X	±0.38	.X	±3'	SHEET SIZE	A4	SERIES	DS1031-01 SERIES
.XX	±0.25	.XX	±2'	晨翔电子有限公司 CONNFLY® CONNFLY ELECTRONIC CO., LTD			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1031-01-XXXXXXX					