

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 07/02/06'	~	LJC 07/02/06'
B	ADD P/N CODE	LJC 12/12/13'		

NOTES:

1. SPECIFICATIONS:

- 1.1 CONTACT RESISTANCE: 20mΩ Max.
- 1.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
- 1.3 INSULATION RESISTANCE: 1000MΩ Min.
- 1.4 OPERATING TEMPERATURE: -40°C~+105°C.
- 1.5 MALE PIN RANGE: $\phi 0.381 \sim 0.635$.
- 1.6 CURRENT RATING: 3A Per Pin Max.

2. PRODUCT NUMBER CODE:

DS1002-01 - X X X X - X


CLIP TYPE[Ⓢ]
JK: IMPORT
GC: DOMESTIC

Clip plating
1: Tin 150u"
2: Tin 200u"
3: G/F
4: Gold 3u"
5: Gold 10u"
6: Gold 15u"


Pin plating
1: Tin 150u"
2: Tin 200u"
3: G/F
4: Gold 3u"
5: Gold 10u"
6: Gold 15u"

Mounting type
V: V/T TYPE
R: R/A TYPE
S: SMT TYPE


No. of contacts
1*1 - 1*64
2*1 - 2*40




Dual rows




Single row

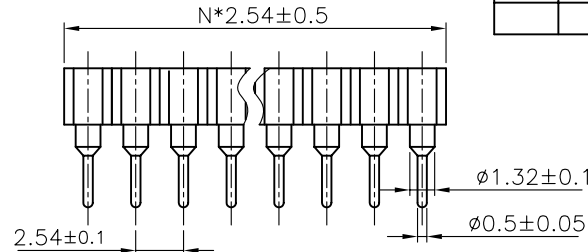


V/T TYPE




Dual rows




Single row

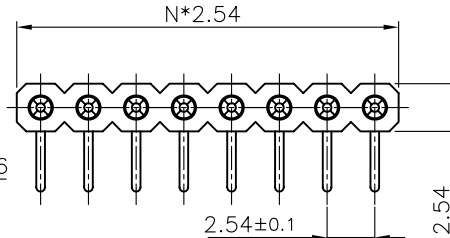


R/A TYPE



Dual rows



Single row

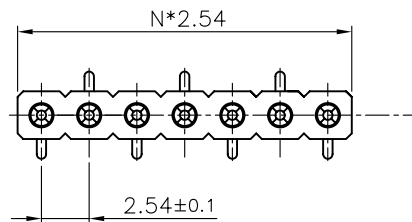

SMT TYPE

N: No. of contacts

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	TITLE	2.54mm IC SOCKET(Machine Pin) R/A, V/T & SMT Type	
UNITS	mm	SHEET SIZE	A4
SHEET SIZE	A4	SERIES	DS1002-01 SERIES

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	10F1
DRAWING NO.	C-DS1002-01-XXXX-X-B		


晨翔电子有限公司
CONNFLY® CONNFLY ELECTRONIC CO., LTD