

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	HP 23/06/05		

NOTES:


1. SPECIFICATIONS

- . Contact Resistance: 30mΩ max
- . Insulator Resistance: 1000MΩ min.
- . Current Rating: 30V DC 1.5 A max
- . Dielectric withstanding voltage: AC500V For 1 minute
- . Contact: Copper alloy
- . Housing: PBT.

2. PRODUCT NUMBER CODE:

DS1108 - X X X

- Contact plating
 - 0: selective gold flash
 - C 3u" gold
 - 3: 30u" gold
- Shell plating
 - 6: tin
 - N: nickel
 - 8: full gold
- Color of housing
 - W: white
 - B: black

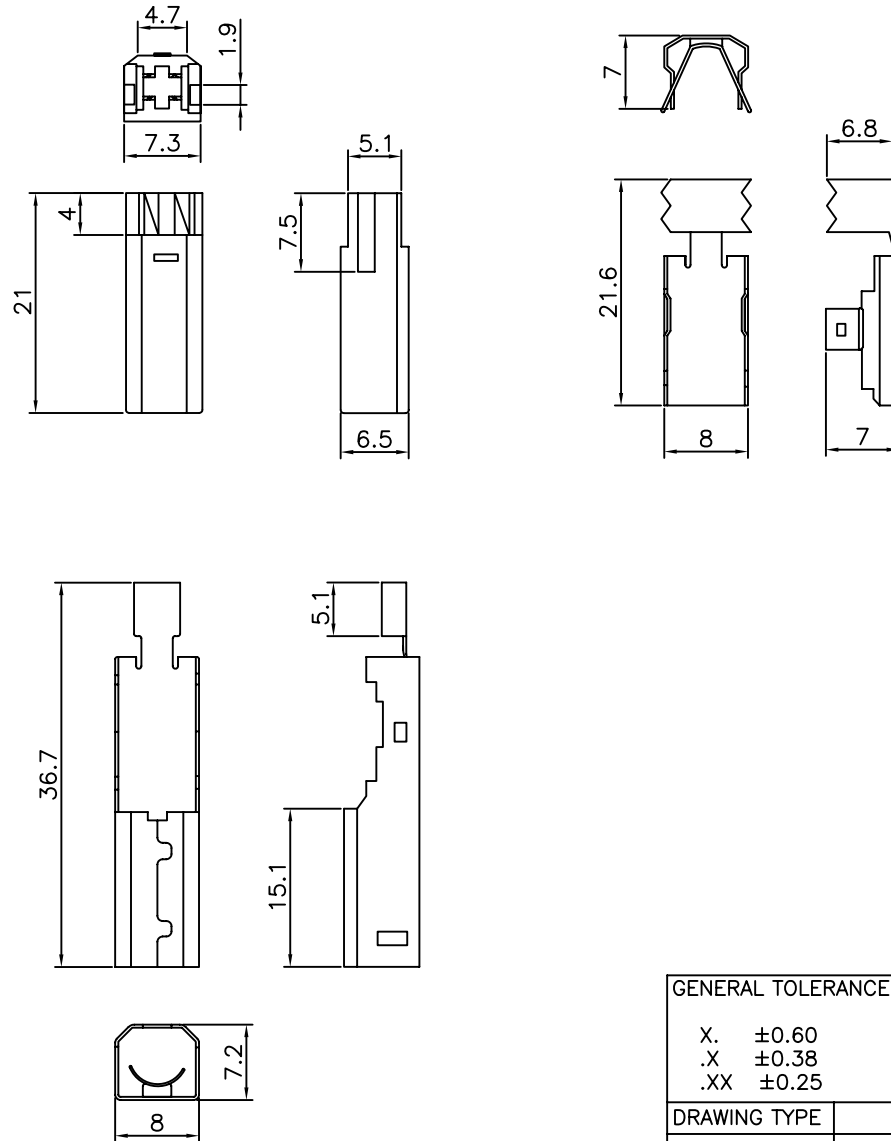

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	USB-B MALE SOLDER	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1108	
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY® CONNFLY ELECTRONIC CO., LTD				
DRAWING TYPE		CUSTOMER						
SCALE		1:1	SHEET 1 OF 1					
DRAWING NO.		C-DS1108-XXX						