


20A 12V DC
10A 28V DC
6A 12V

FEATURES


- * Watertight boot (R13-112-12) is optional (refer page 72).
- * For wire connector, please refer to page 70(R4-57).

10A 28V DC, 6A 12V
for A, B, C, D, L

ROCKER

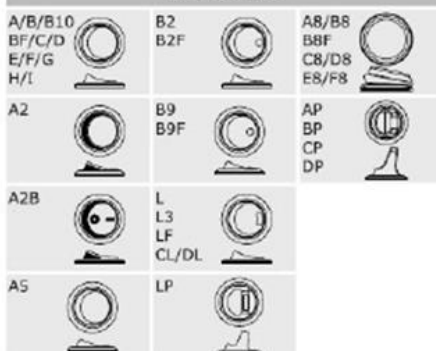

FUNCTION

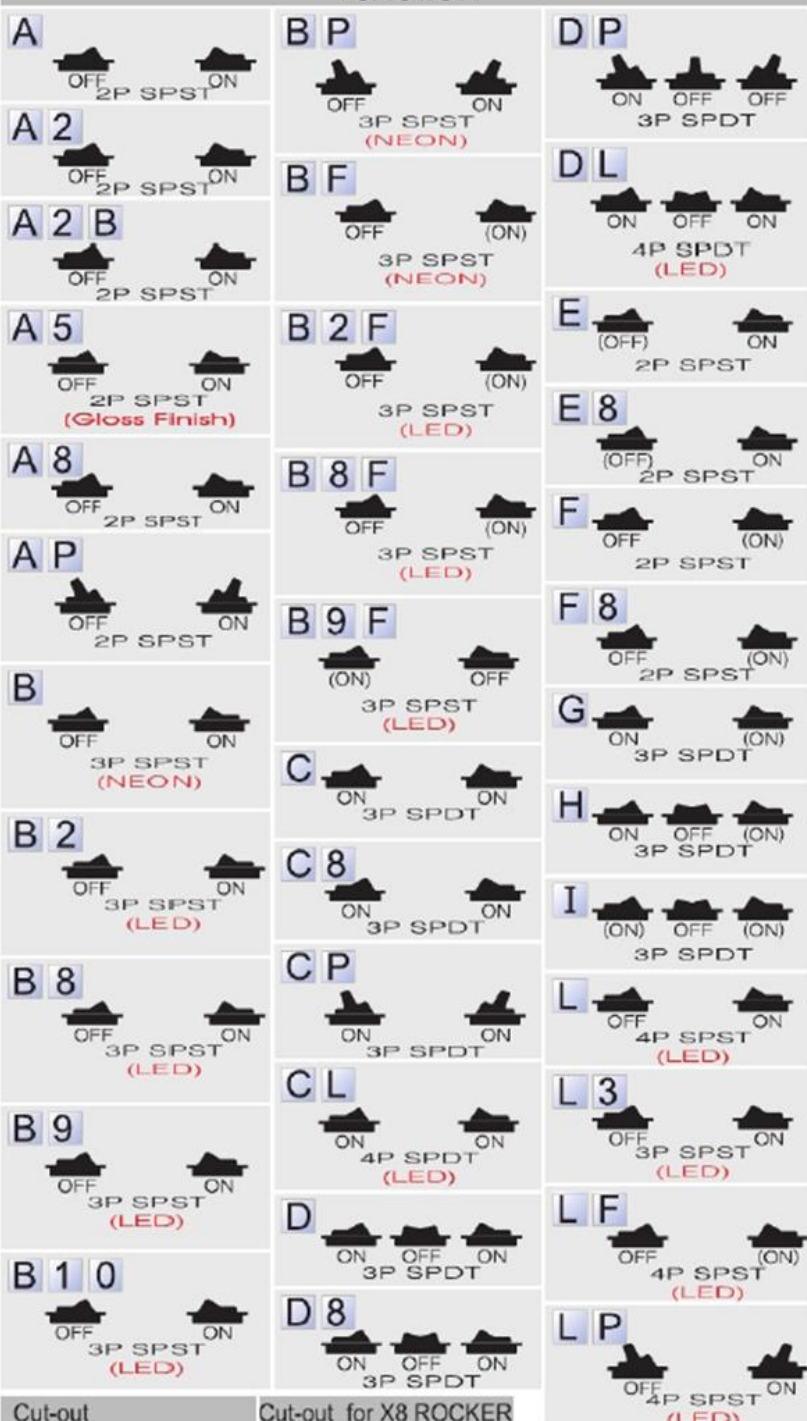

TERMINAL

- 0 2 .187" SQ
- 0 9 PC A/C/D/E/F/G/H/I
- 1 2 SO A/C/D/E/F/G/H/L