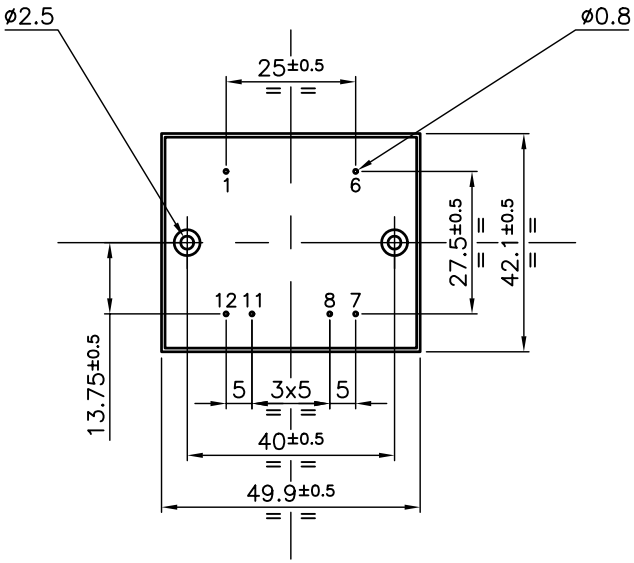

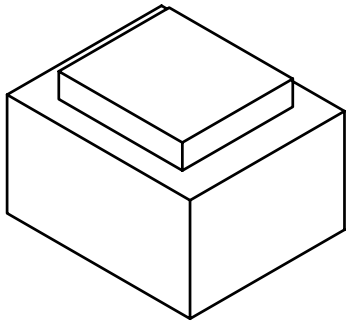

SAFETY ISOLATING TRANSFORMER

POWER : 10VA
INPUT VOLTAGE : 230V
FREQUENCY : 50/60Hz
NOMINAL OUTPUT VOLTAGE : 12V

NON SHORT CIRCUIT PROOF TRANSFORMER
IP00
UL94VO
OPERATING TEMPERATURE : −25°C to 50°C
STORAGE TEMPERATURE : −25°C to 85°C
INSULATION CLASS (IEC85) : B
REQUIRED PROTECTION : 63mA FUSE ON PRIMARY

STANDARDS :
UL506 (File E111078)
CSA 22−2 (File E111078)
VDE (File Ref:1398300)
EN60950 (File Ref:1398300)
EN61558−1 (File Ref:1398300)
EN61558−2−6 (File Ref:1398300)
CE





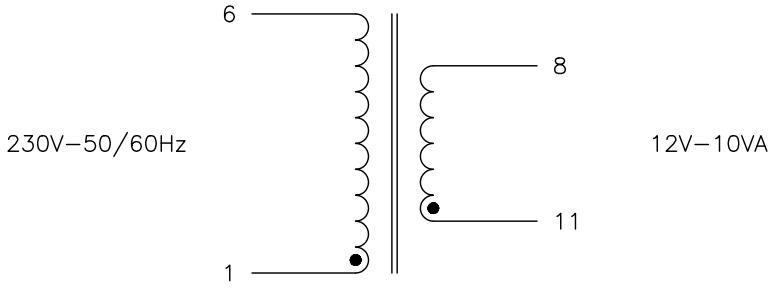



Rev	Date	Modification	Dessiné	Visa
D				
C				
B				
A				

Finition: / Finition:		Tolérance générale: / General tolerance:	
Ech: 1:1	Matière: / Material:		
Dessiné par: ROUSSEL.Ch	Date: 09/02/2003	Visa: J.P.M.	

DATA SHEET 44267
EI 48x16.8

myrra
22 Allée du Clos des Charmes
Z.A. Les Portes de la Forêt
77090 COLLEGIEN
Tel : 01−60−37−55−55
Fax : 01−60−17−12−00

DS44267