

1 2 3 4 5 6 7 8 9 10 11 12 13 14

A

A

B

B

C

C

D

D

E

E

F

F

G

G

H


H

I

I

J

J

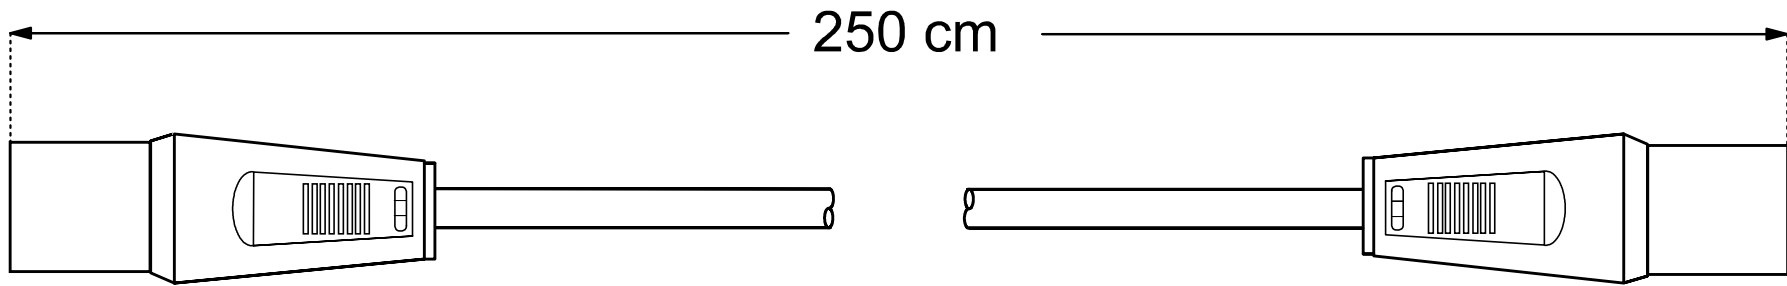

- Koaxial Anschluss Kabel; weiß
  - Koaxialstecker --- Koaxialkupplung
  - doppelt geschirmtes Koaxialkabel (Al Folienschirmung + Geflecht)
  - Impedanz 75 Ohm
  - 32er Geflecht
  - Innenleiter: 0,5mm CCS
  - Aussendurchmesser: 5,0 mm
  - Ausführung: 3C-2V
  - RoHS-konform
- coaxial cable; 2.5 m; white; bulk
  - coaxial plug --- coaxial jack
  - double shielded coaxial cable (Al foil screening + net)
  - impedance 75 ohm
  - 32 braiding
  - inner conductor: 0.5mm CCS
  - outer diameter: 5.0 mm
  - impedance 75 ohm
  - construction: 3C-2V
  - RoHS-compliant

Änderungen			Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.:	05.02.2007	li	<b>AK 250</b>	11511
07.05.2009	li	gepr.:	05.02.2007	li		
		Norm:			Zeichnungs-Nr.:	von

1 2 3 4 5 6 7 8 9 10 11 12 13 14