

1 2 3 4 5 6 7 8 9 10 11 12 13 14

A

A

B

B

C

C

D

D

E

E

F

F

G

G

H


H

I

I

J

J

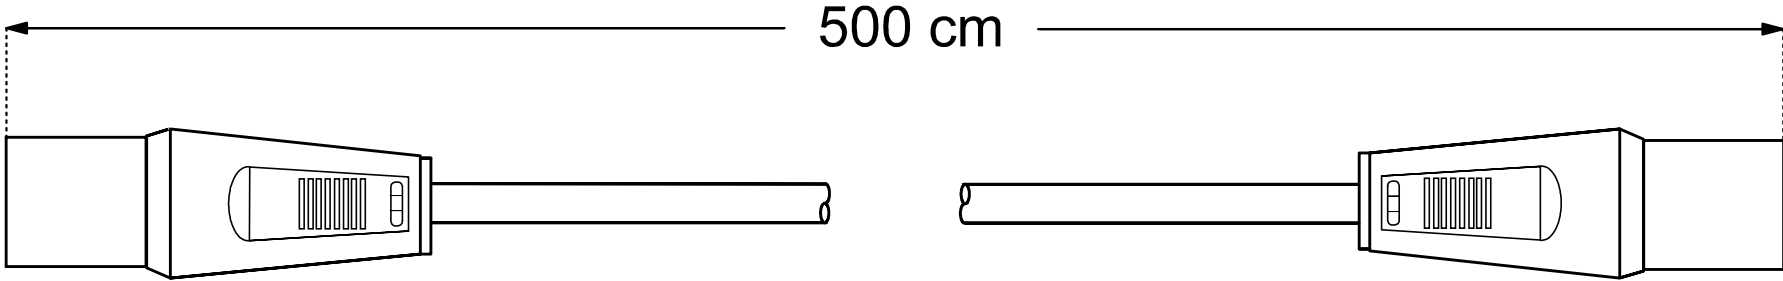

- Koaxial Anschluss Kabel; schwarz
 - Koaxialstecker --- Koaxialkupplung
 - doppelt geschirmtes Koaxialkabel (Al Folienschirmung + Geflecht)
 - Impedanz 75 Ohm
 - 32er Geflecht
 - Innenleiter: 0,5 mm CCS
 - Aussendurchmesser: 5,0 mm
 - Ausführung: 3C-2V
 - RoHS-konform
- coaxial cable; 5.0 m; black; bulk
 - coaxial plug --- coaxial jack
 - double shielded coaxial cable (Al foil screening + net)
 - impedance 75 ohm
 - 32 braiding
 - inner conductor: 0.5mm CCS
 - outer diameter: 5.0 mm
 - impedance 75 ohm
 - construction: 3C-2V
 - RoHS-compliant

| Änderungen | | | Datum | Name | Bezeichnung | Blatt |
|------------|------|--------|------------|------|-----------------------|-------|
| Datum | Name | gez.: | 07.05.2009 | li | AK 500 B 11723 | |
| | | gepr.: | 07.05.2009 | li | | |
| | | Norm: | | | Zeichnungs-Nr.: | von |

1 2 3 4 5 6 7 8 9 10 11 12 13 14