

1 2 3 4 5 6 7 8 9 10 11 12 13 14

A

A

B

B

C

C

D

D

E

E

F

F

G

G

H


H

I

I

J

J

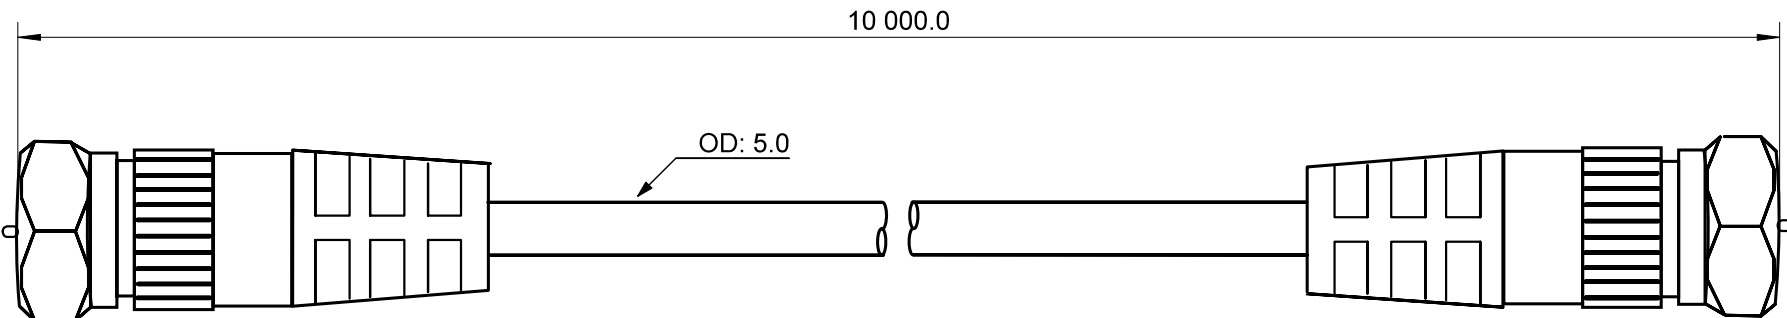

- SAT Anschluss Kabel; weiß
- F-Stecker > F-Stecker
- doppelt geschirmtes Koaxialkabel (Al Folienschirmung + Geflecht)
- Ausführung 3C-2V
- Impedanz: 75 Ohm
- Schirmungsmaß: > 75 dB
- Innenleiter 0,5 mm CCS
- Isolation/Dielektrikum: PVC/FPE
- RoHS-konform

- *F-cable; white; bulk*
- *F plug > F plug*
- *double shielded coaxial cable (Al foil screening + net)*
- *cable 3C-2V*
- *Screening immunity: > 75 dB*
- *Impedance: 75 Ohms*
- *inner conductor 0.5 mm CCS*
- *Insulation/Dielectric: PVC/FPE*
- *RoHS compliant*

Änderungen		Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.: 26.09.2012	tf	AKF 1000	
		gepr.: 26.09.2012	tf		
		Norm:		Zeichnungs-Nr.: 11742	von

1 2 3 4 5 6 7 8 9 10 11 12 13 14