

1 2 3 4 5 6 7 8 9 10 11 12 13 14

A

A

B

B

C

C

D

D

E

E

F

F

G

G

H


H

I

I

J

J

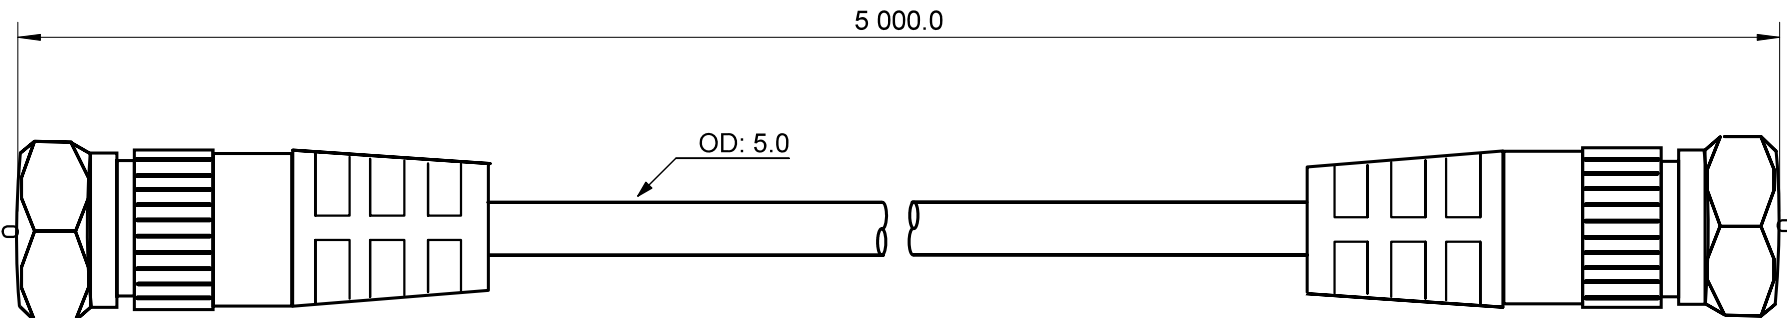

- SAT Anschluss Kabel; weiß
- F-Stecker > F-Stecker
- doppelt geschirmtes Koaxialkabel (Al Folienschirmung + Geflecht)
- Ausführung 3C-2V
- Impedanz: 75 Ohm
- Schirmungsmaß: > 75 dB
- Innenleiter 0,5 mm CCS
- Isolation/Dielektrikum: PVC/FPE
- RoHS-konform

- F-cable; white; bulk
- F plug > F plug
- double shielded coaxial cable (Al foil screening + net)
- cable 3C-2V
- Screening immunity: > 75 dB
- Impedance: 75 Ohms
- inner conductor 0.5 mm CCS
- Insulation/Dielectric: PVC/FPE
- RoHS compliant

Änderungen		Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.: 26.09.2012	tf	AKF 500	
		gepr.: 26.09.2012	tf		
		Norm:		Zeichnungs-Nr.: 11725	von

1 2 3 4 5 6 7 8 9 10 11 12 13 14