


**SUB-D KONEKTORI . . . . . UTSD**  
**SUB-D KONEKTORI ZA FLET KABL . . . . . UTSDF**

**Tehnički podaci**

Materijal za kućište: poliester ojačan staklenim vlaknima  
 okvir od niklovanog čelika  
 Boja: plastika siva, okvir srebrnast  
 legiran bakrom  
 Kontakti: 0,3 μm zlata na 2,5 μm nikla  
 Raster: 1,27 mm  
 Ispitni napon: 1000 V<sub>eff.</sub>  
 Struja: 1A  
 Radna temperatura: -55... +125°C

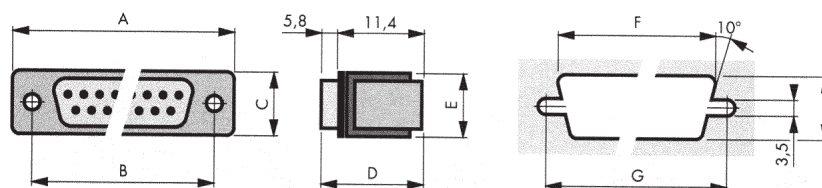

	Tip	Pol	Dimenzije u mm							
			A	B	C	D	E	F	G	H
<b>Muški</b>	<b>M09</b>	9	30,9	25,0	12,7	16,0	12,7	19,1	25,0	10,0
	<b>M15</b>	15	39,2	33,3	12,7	16,0	12,7	27,0	33,3	10,0
	<b>M25</b>	25	53,0	47,0	12,7	16,0	12,7	41,0	47,0	10,0
	<b>M37</b>	37	69,4	63,5	12,7	16,0	12,7	57,2	63,5	10,0
<b>Zenski</b>	<b>Z09</b>	9	30,9	25,0	12,7	16,0	12,7	19,1	25,0	8,0
	<b>Z15</b>	15	39,2	33,3	12,7	16,0	12,7	27,0	33,3	8,0
	<b>Z25</b>	25	53,0	47,0	12,7	16,0	12,7	41,0	47,0	8,0
	<b>Z37</b>	37	69,4	63,5	12,7	16,0	12,7	57,2	63,5	8,0