


SPECIFICATION	
MATERIAL	Insulator: Thermal Plastic UL94V-0 Contacts: Copper Alloy Boardlock: Copper Alloy
CONTACT PLATING	Underplate: 50μ" Nickel Contact Area: 3μ" and 15μ" Selective Gold Solder Tails Area: 100μ" Tin/Lead Free
ELECTRICAL	Current Rating: 1 Amps Max. Contact Resistance: 100 mohms Max. Insulation Resistance: 1000 Mohms Min @ 500 VDC
MECHANICAL	Mating Cycles: 10000 Cycles Operating Temperature: -25°C TO +85°C

RECOMMENDED P.C.B LAYOUT
TOLERANCES: ±0.05mm

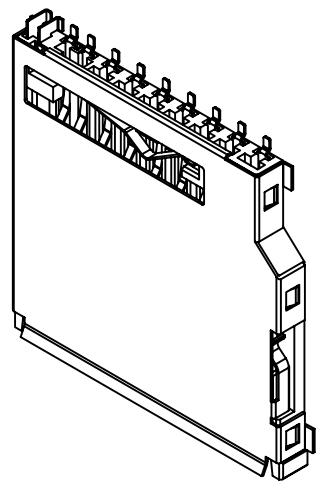

PIN#	NAME
1	CD/DAT3
2	CMD
3	VSS1
4	VDD
5	CLK
6	VSS2
7	DAT0
8	DAT1
9	DAT2

UNLESS OTHERWISE SPECIFIED TOLERANCE
ANG. ±5°
0. ±0.5
.0 ±0.3
.00 ±0.2

Attend
ATTEND TECHNOLOGY INC.
TEL:886-2-26987028 FAX:886-2-26987078

SCALE: AS SHOWN	UNIT: mm
DRAWN Terry	09/26/05
CHECKED	/ /
APPROVED	/ /

DRAWN NAME: MEMORY CARD
SECURE DIGITAL (STANDARD)
PRODUCT NO. 104C-TAA0-R
FILE NAME: 104C-TAA0-R

REV.	DESCRIPTION	DATE