

**KONTAKTNE LETVICE . . . . . UTKL**


**KONTAKTNE LETVICE – MUŠKE . . . . . UTKLM**

**Tehnički podaci**

Izolacioni materijal: Poliester UL 94 V – 0      Struja: 1 A  
 Kontakti: Mesing, cinkovani      Otpor izolacije: 1000 MΩ (500 V DC)  
 Ispitni napon: 1000 V AC (1 min.)      Radna temperatura: -55... +105°C


**JEDNOREDNE RM 2,54 mm**

Tip	Pol	Dimenzije u mm	
		A	B
1 x 36	36	91,44	88,90
1 x 40	40	101,60	99,06
1 x 50	50	127,00	124,46
1 x 50p	50	127,00	124,46

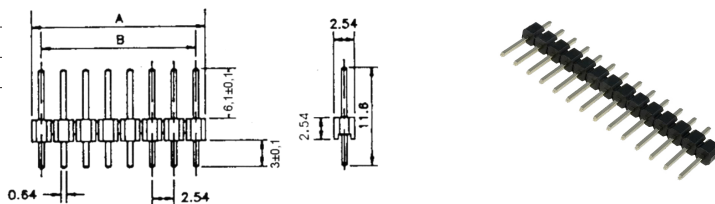


**JEDNOREDNE 90° RM 2,54 mm**

Tip	Pol	Dimenzije u mm	
		A	B
U1x36	36	91,44	88,90
U1x40	40	101,60	99,06
U1x50	50	127,00	124,46
U1x50p	50	127,00	124,46

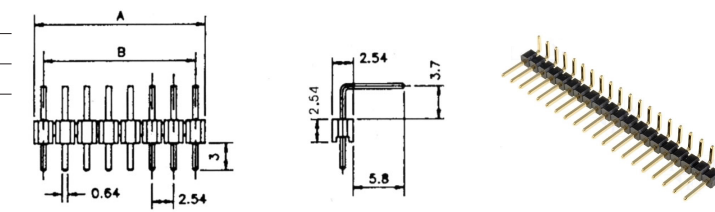


**DVOREDNE RM 2,54 mm**

Tip	Pol	Dimenzije u mm	
		A	B
2 x 36	72	91,44	88,90
2 x 40	80	101,60	99,06
2 x 50	100	127,00	124,46
2 x 50p	100	127,00	124,46

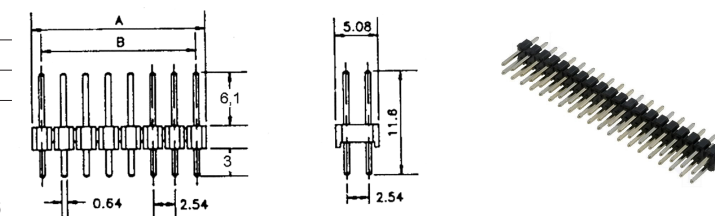

**DVOREDNE 90° RM 2,54 mm**

Tip	Pol	Dimenzije u mm	
		A	B
U2x36	72	91,44	88,90
U2x40	80	101,60	99,06
U2x50	100	127,00	124,46
U2x50p	100	127,00	124,46

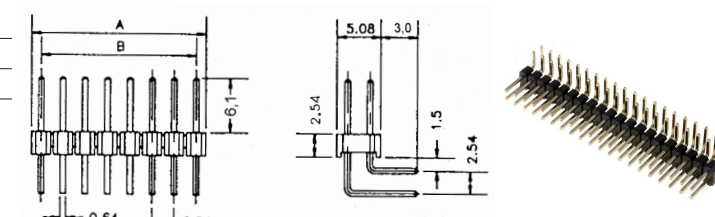

**TROREDNE RM 2,54 mm**

Tip	Pol	Dimenzije u mm	
		A	B
3 x 32	96	81,28	78,74

