

**KONTAKTNE LETVICE . . . . . UTKL**


**KONTAKTNE LETVICE – PROFESIONALNE- . . . . . UTKLP**

**Tehnički podaci**

Izolacioni materijal:	Poliester UL 94 V – 0	Struja:	3 A
Kontakti:	Mesing, nikl i pozlata	Prolazni otpor:	10 mΩ
Ispitni napon:	1000 V AC (1 min.)	Otpor izolacije:	> 10000 MΩ
Radni napon:	100 V RMS / 150 V DC	Radna temperatura:	-55... +125°C



**JEDNOREDNE H = 6,9 mm RM 2,54 mm**

Tip	Pol
1 x 5	5
1 x 10	10
1 x 20	20
1 x 36	36

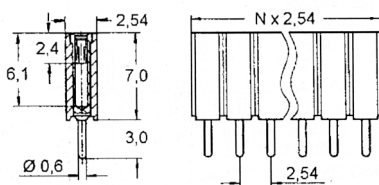

**DVOREDNE H = 6,9 mm RM 2,54 mm**

Tip	Pol
2 x 10	20
2 x 20	40
2 x 36	72

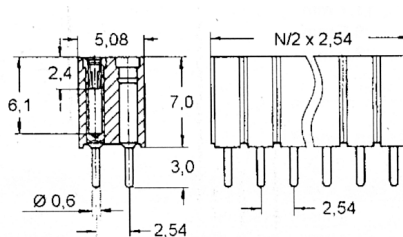

**KRATKOSPOJNICI – JUMPERI RM 2,54 mm . . . . . UTKLK**

Tip	Opis
Zatvoreni	<b>ZCR</b> crveni
	<b>ZCN</b> crni
Otvoreni	<b>OCR</b> crveni
	<b>OCN</b> crni

