



AMP MIKRO KONEKTORI UTKM

Tehnički podaci

Izolacioni materijal: Termoplastika
 Kontakti: Mesing, niklovani
 Struja po kontaktu: 1,5 A
 Radni napon: 230 V
 Otpor izolacije: 1000 MΩ
 Radna temperatura: -55... +105°C


KABLOVSKI, ZENSKI . . . UTKMKZ

| Tip | Pol | Dimenzije u mm | | |
|-----|-----|----------------|------|-------|
| | | A | B | C |
| 04 | 4 | 8,6 | 5,4 | 3,81 |
| 06 | 6 | 11,1 | 8,0 | 6,35 |
| 08 | 8 | 13,6 | 10,5 | 8,89 |
| 10 | 10 | 16,2 | 13,0 | 11,43 |
| 12 | 12 | 18,7 | 15,6 | 13,97 |
| 14 | 14 | 21,3 | 18,1 | 16,51 |
| 16 | 16 | 23,8 | 20,7 | 19,05 |
| 20 | 20 | 28,9 | 25,7 | 24,13 |


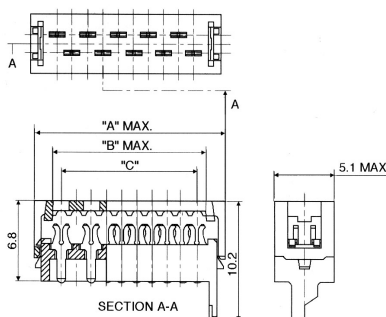


PRINT, MUŠKI UTKMPM

| Tip | Pol | Dimenzije u mm | |
|-----|-----|----------------|------|
| | | A | B |
| 04 | 4 | 3,81 | 7,1 |
| 06 | 6 | 6,35 | 9,7 |
| 08 | 8 | 8,89 | 12,2 |
| 10 | 10 | 11,43 | 14,7 |
| 12 | 12 | 13,97 | 17,3 |
| 14 | 14 | 16,51 | 19,8 |
| 16 | 16 | 19,05 | 22,4 |
| 20 | 20 | 24,13 | 27,4 |




Raster: 1,27mm



PRINT, ZENSKI UTKMPZ

| Tip | Pol | Dimenzije u mm | |
|-----|-----|----------------|------|
| | | A | B |
| 04 | 4 | 3,81 | 7,1 |
| 06 | 6 | 6,35 | 9,7 |
| 08 | 8 | 8,89 | 12,2 |
| 10 | 10 | 11,43 | 14,7 |
| 12 | 12 | 13,97 | 17,3 |
| 14 | 14 | 16,51 | 19,8 |
| 16 | 16 | 19,05 | 22,4 |
| 20 | 20 | 24,13 | 27,4 |

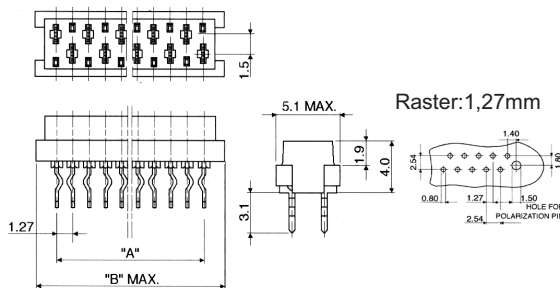

Raster: 1,27mm

