

**KONTAKTNE LETVICE . . . . . UTKL**


**KONTAKTNE LETVICE – ZENSKE . . . . . UTKLZ**

**Tehnički podaci**

Izolacioni materijal:	Poliester UL 94 V – 0	Struja:	3 A
Kontakti:	Bakar, pocinkovani ili pozlaćeni	Prolazni otpor:	< 20 mΩ
Ispitni napon:	1000 V AC (1 min.)	Otpor izolacije:	> 10 <sup>9</sup> Ω
Radni napon:	250 V AC	Radna temperatura:	-55... +125°C


**JEDNOREDNE H = 5,5 mm RM 2,54 mm**

	Tip	Pol
Pocinkovane	5-1x5	5
	5-1x10	10
	5-1x15	15
	5-1x20	20
Pozlaćene	5P-1x5	5
	5P-1x10	10
	5P-1x15	15
	5P-1x20	20

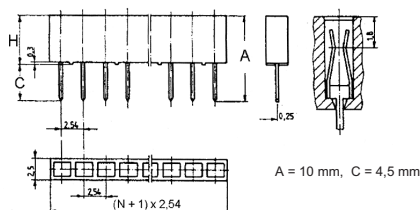



**JEDNOREDNE H = 5,5 mm RM 2,54 mm 90°**

	Tip	Pol
Pozlaćene	5U-1x5	5
	5U-1x10	10
	5U-1x15	15
	5U-1x20	20



**JEDNOREDNE H = 8,5 mm RM 2,54 mm**

	Tip	Pol
Pocink.	8-1x5	5
	8-1x10	10
	8-1x20	20
Pozl.	8P-1x5	5
	8P-1x10	10
	8P-1x20	20

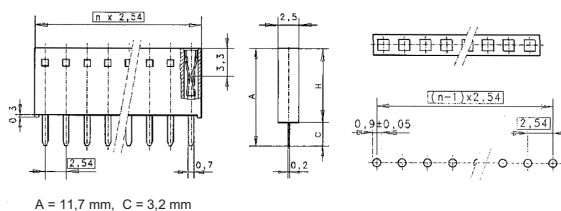

**DVOREDNE H = 8,5 mm RM 2,54 mm**

	Tip	Pol
Pozl. Pocink.	8-2x10	20
	8-2x20	40
	8P-2x10	20
	8P-2x20	40

