

NYLON KONEKTORI UTKN


NYLON KONEKTORI RM 2,54 mm UTKN2

Tehnički podaci


Izolacioni materijal:	Nylon	Otpor izolacije:	min. 1000 MΩ
Radni napon:	250 V AC/DC	Prolazni otpor:	min. 10 mΩ
Ispitni napon:	1000 V AC (1 min.)	Radna temperatura:	-25... +85°C
Struja:	3 A AC/DC		

KABLOVSKI, ZENSKI

Tip	Pol	Dimenzije u mm	
		A	B
K02	2	2,54	5,60
K03	3	5,08	8,10
K04	4	7,62	10,70
K05	5	10,16	13,20
K08	8	17,78	20,80
K10	10	22,86	25,90
K20	20	48,26	50,30




KONTAKTNI PINOVI

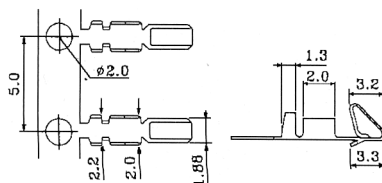

PRINT, MUŠKI

Tip	Pol	Dimenzije u mm	
		A	B
P02	2	2,54	5,60
P03	3	5,08	8,10
P04	4	7,62	10,70
P05	5	10,16	13,20
P08	8	17,78	20,80
P10	10	22,86	25,90
P20	20	48,26	50,30

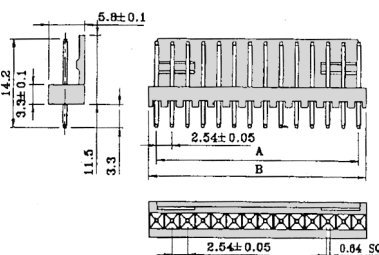

PRINT 90°, MUŠKI

Tip	Pol	Dimenzije u mm	
		A	B
PU02	2	2,54	5,60
PU03	3	5,08	8,10
PU04	4	7,62	10,70
PU05	5	10,16	13,20
PU08	8	17,78	20,80
PU10	10	22,86	25,90
PU20	20	48,26	50,30

