



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
CM	00	F4	REVISED PER ECO-11-004820		11MAR11	RK	HMR

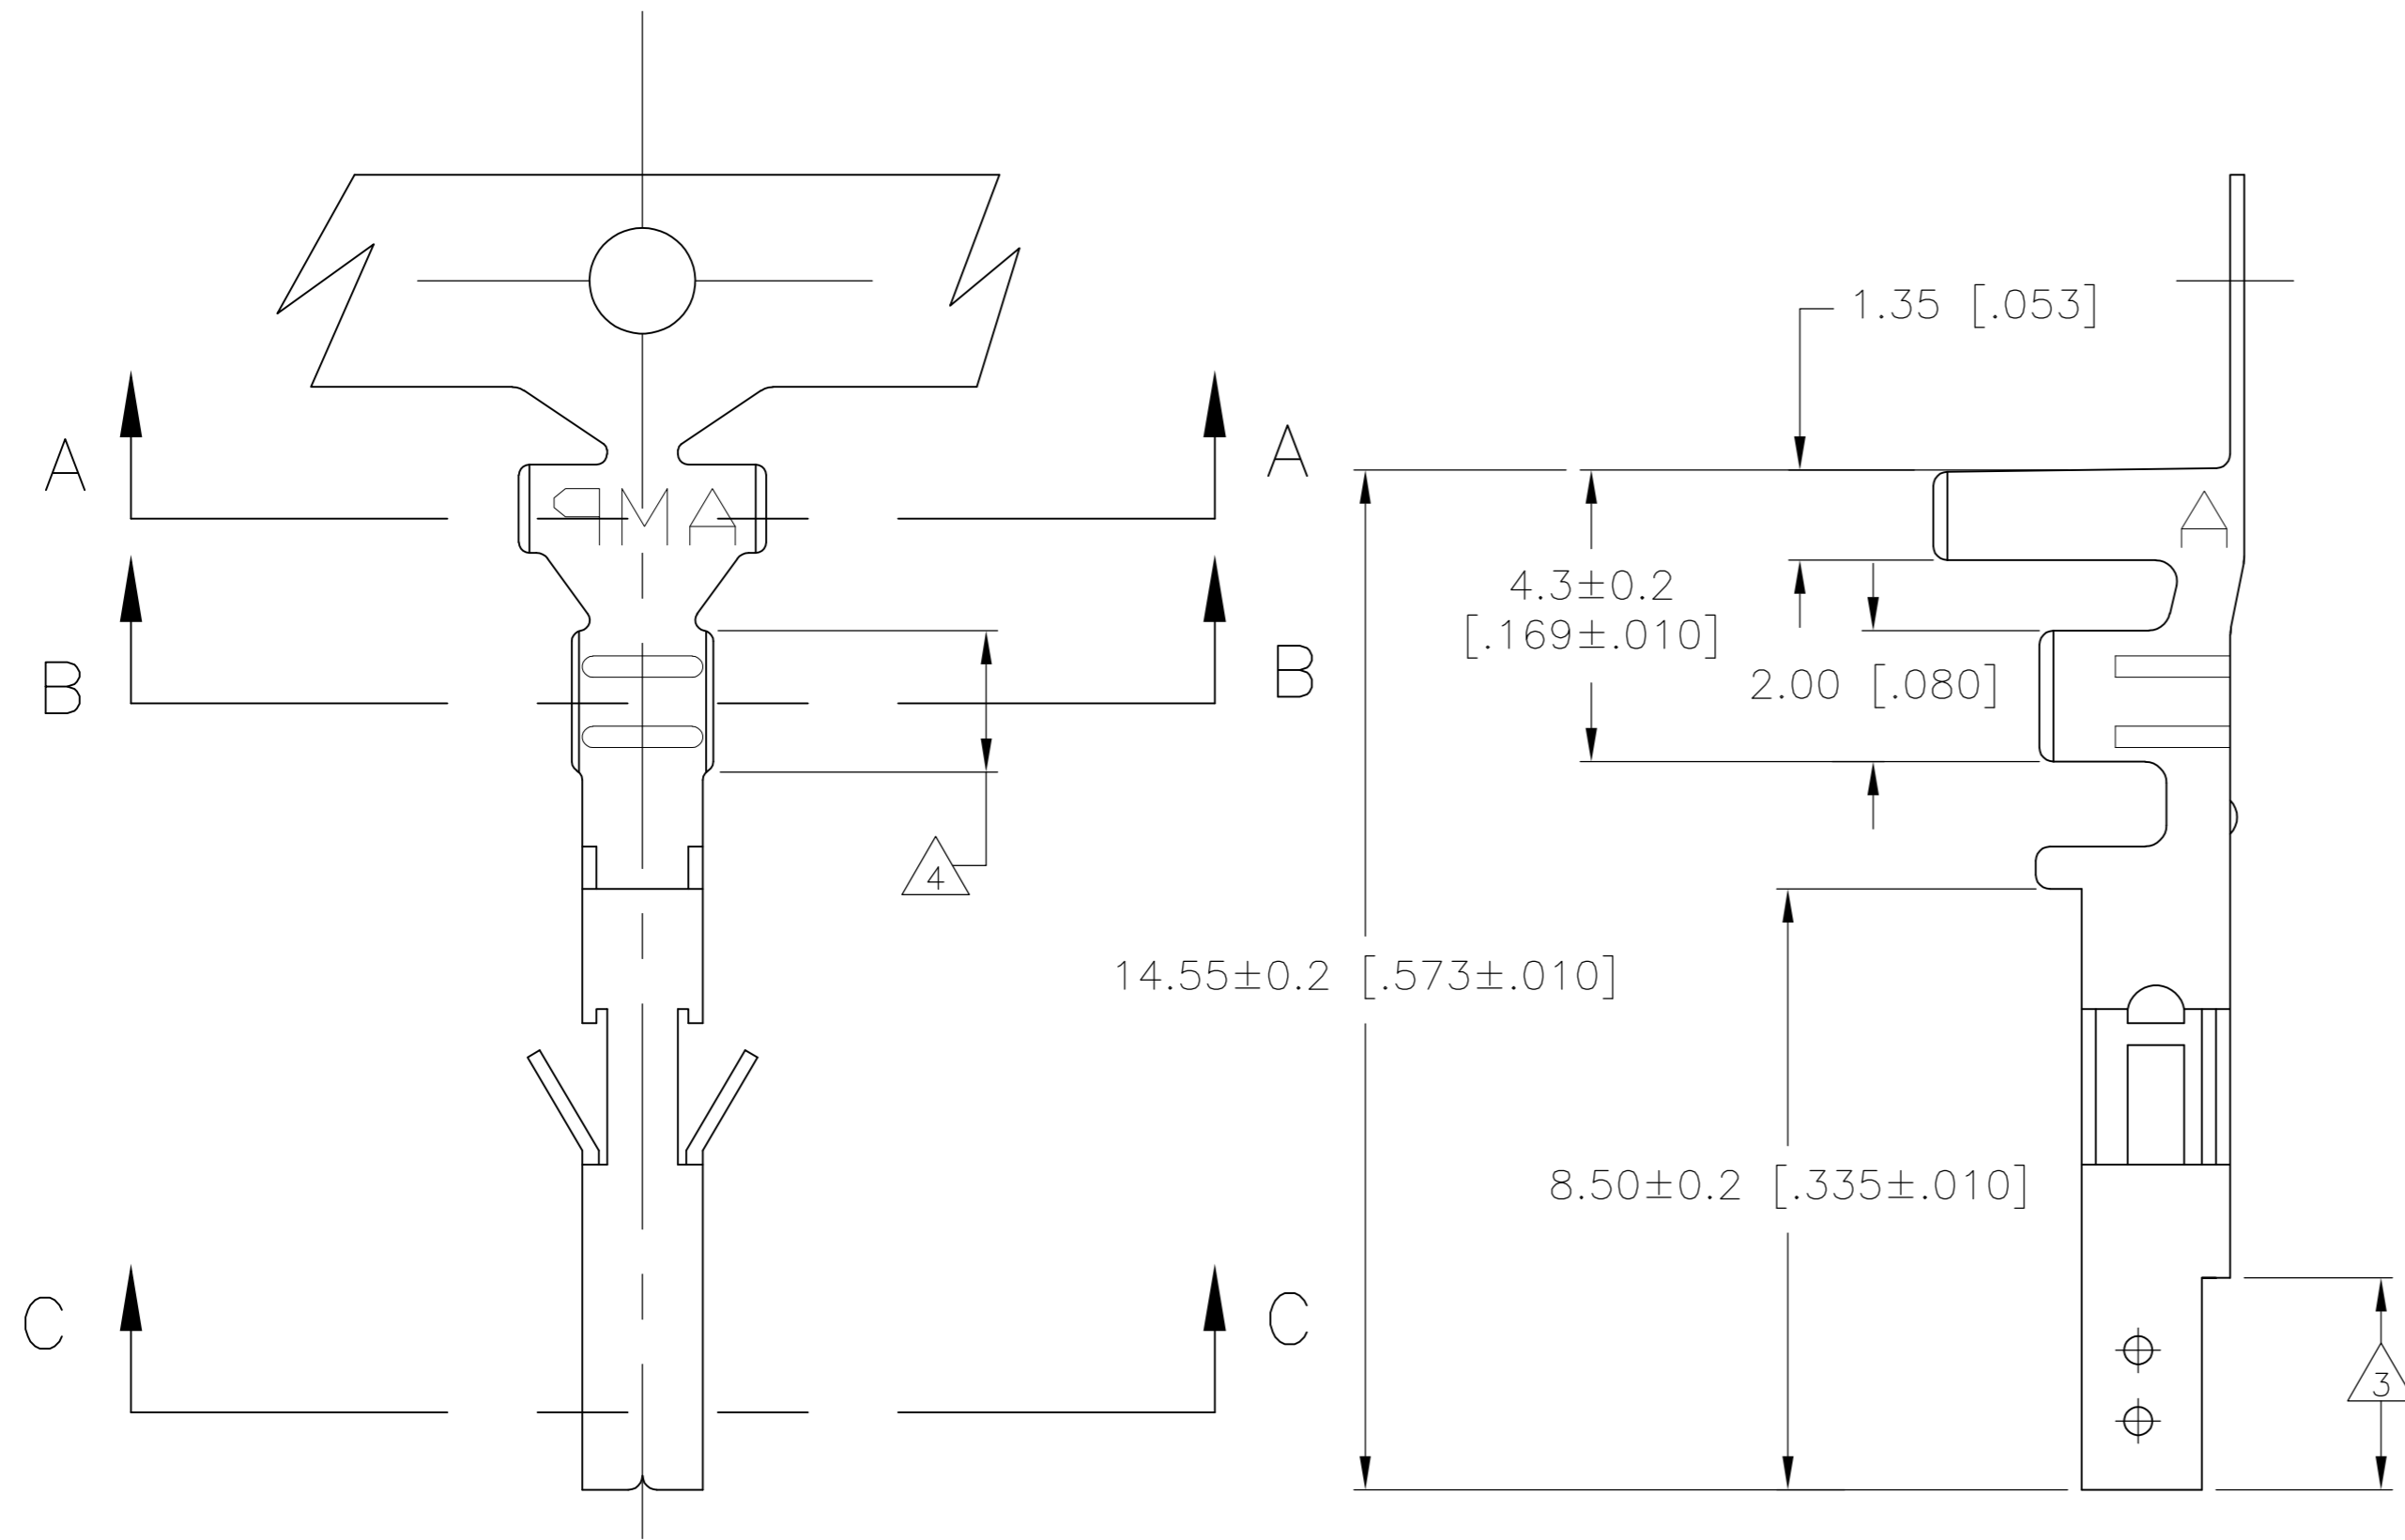

- 1 WIRE RANGE: 0.13–0.32mm² (26–22 AWG).
- 2 INSULATION RANGE: 1.20–1.75 DIA.
- 3 FINISH: 0.76 MIN GOLD OVER 1.27μm MIN NICKEL REQUIRED ON INNER SURFACE, PERMITTED ON OUTER SURFACE.
- 4 FINISH: 2.54μm MIN PRE-TIN ON ALL SURFACES IN THIS AREA.
- 5 FINISH: 2.54μm MINIMUM PRE-TIN ALL OVER.

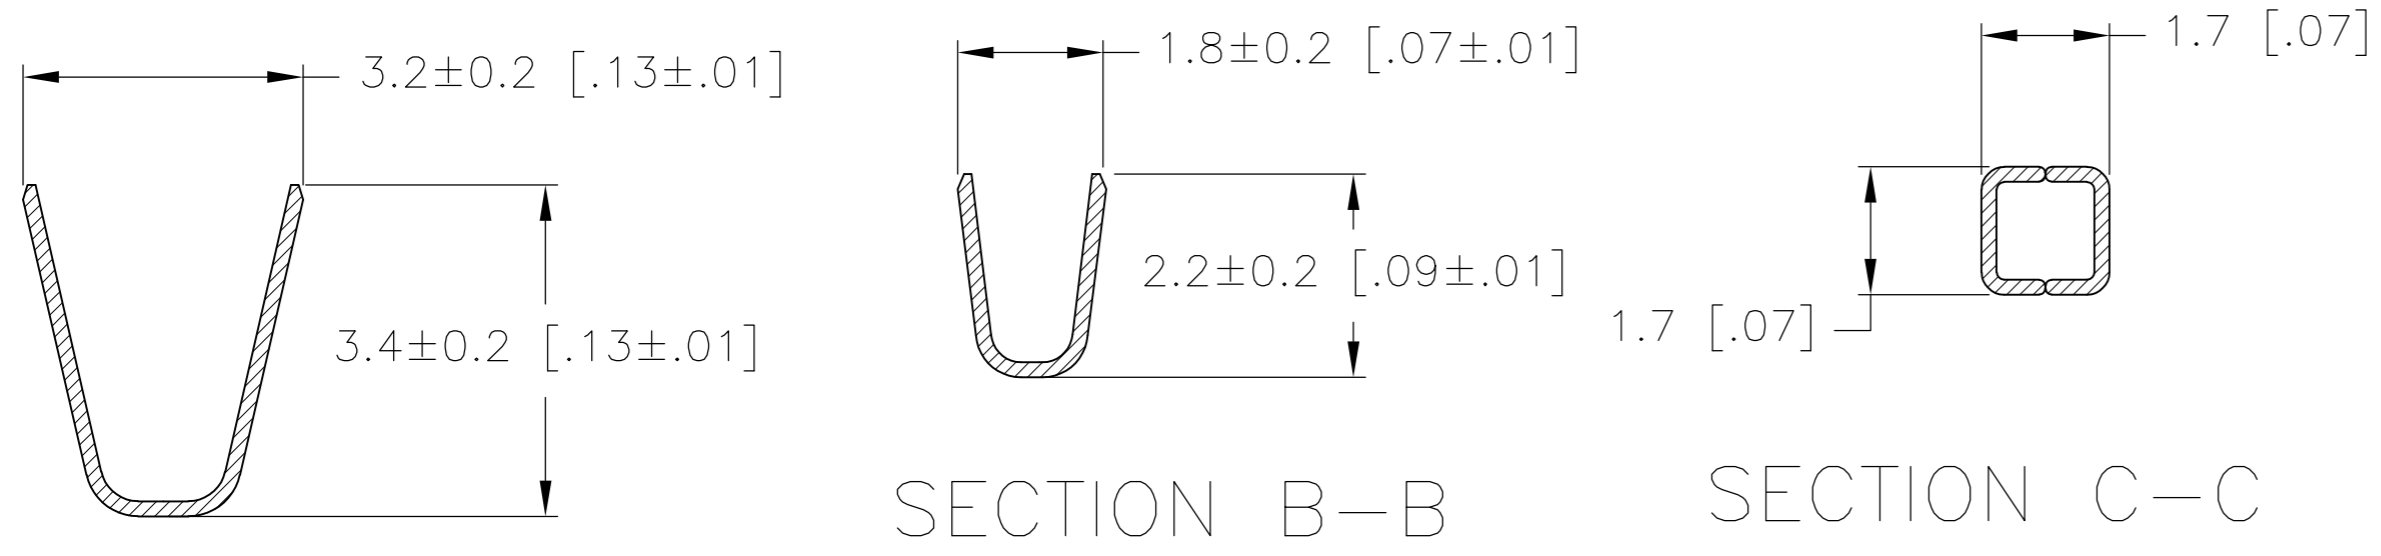

GOLD	3 4	PHOS. BRZ.	794958-4
PRE-TIN	5	PHOS. BRZ.	794958-3
GOLD	3 4	BRASS	794958-2
PRE-TIN	5	BRASS	794958-1
FINISH:		MATERIAL:	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN: S. HAMM 10-SEP-2001
 CHK: D. COLEY 10-SEP-2001
 APVD: D. COLEY 10-SEP-2001

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±
1 PLC	± 0.15 [.006]
2 PLC	± 0.10 [.004]
3 PLC	± 0.050 [.0020]
4 PLC	±
ANGLES	±

APVD: D. COLEY 10-SEP-2001
 PRODUCT SPEC
 APPLICATION SPEC

MATERIAL: FINISH

WEIGHT

CUSTOMER DRAWING

SCALE: 10:1

SHEET: 1 OF 1

REV: F4

TE Connectivity

NAME: D. COLEY

TERMINAL SOCKET VAL-U-LOK(TM)

SIZE: A2 CAGE CODE: 00779 C=794958

RESTRICTED TO: -

METRIC