



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 05/17/05'		LJC 05/17/05'
B	统一尺寸规格	LL 11/16/06'		LJC 11/16/06'
C	增加尺寸选项	YCH 07/27/10'		

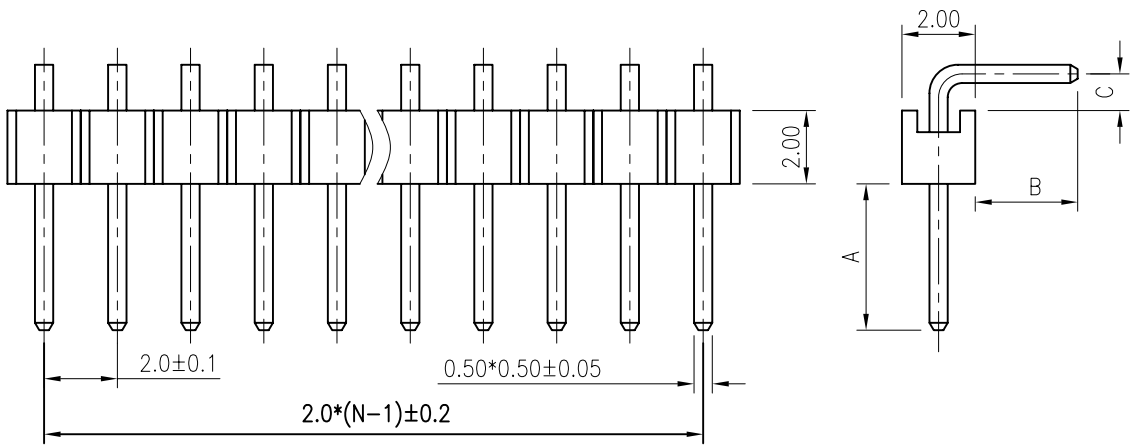

- NOTES:
- MATERIAL&FINISHES
 - INSULATOR:THERMOPLASTIC(UL 94V-0).
 - CONTACT MATERIAL: COPPER ALLOY.
 - SPECIFICATION
 - CURRENT RATING:1.5 Amp.
 - INSULATION RESISTANCE:1000MΩ Min.
 - DIELECTRIC WITHSTANDING:600VAC.
 - CONTACT RESISTANCE:20mΩMax.
 - OPERATING TEMPERATURE:-40°C TO +105°C.

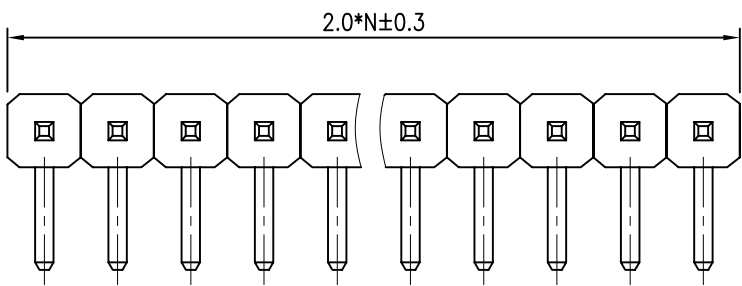

3. PRODUCT NUMBER CODE:
 DS1025-02 - X X X X X - X


Dim. A B C type
 1: Type 1
 5: Type 5

 CONTACTS TYPE
 R:RIGHT ANGLE TYPE
 HOUSING COLOR
 B:BLACK
 CONTACT PLATING
 8:FULL GOLD FLASH
 CONNECTOR TYPE
 P:PLUG
 No.OF CONTACTS
 1*2-1*X

TABLE A:

TYPE	Dimension			Pin Length
	A	B	C	
1	4.00	2.80	1.00	10.50
2	5.00	2.50	1.00	11.00
3	5.00	4.75	0.75	13.10
4	3.80	3.80	0.75	11.00
5	2.50	2.80	1.30	9.20
6	3.70	3.00	1.75	11.00
7				

N: NUMBER OF CONTACTS
 A&B&C: CUSTOMER LENGTH AVAILABLE

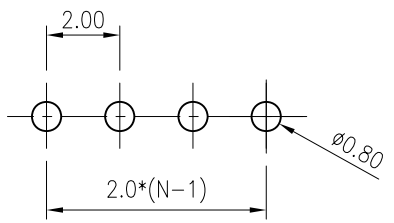

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	SINGLE ROW RIGHT ANGLE	
X.	±0.60	X.	±5'	UNITS	mm			
.X	±0.38	.X	±3'	SHEET SIZE	A4	SERIES	DS1025-02 SERIES	
.XX	±0.25	.XX	±2'	晨翔电子有限公司 CONNFLY® CONNFLY ELECTRONIC CO., LTD				
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.		C-DS1025-02-XXXXX-X-C						