





P1

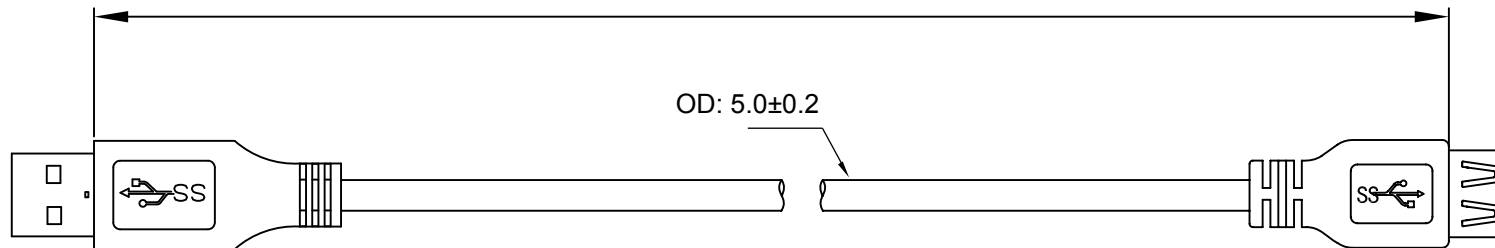


P2



Nr. / No.	Länge / Length (m)
93998	1.80
93999	3.00
95726	5.00

- USB 3.0 SUPER SPEED KABEL
- USB A-Stecker > USB A-Buchse
- Bitrate: bis zu 5Gb/s
- Schirmung: 3-fach
- Isolationswiderstand: 300V 10MOhm
- Spannungsfestigkeit: AC 150V~/s, 1mA
- Kabelaufdruck: E324703 
- AWM STYLE 2725 80°C 30V
- Kontaktwiderstand: 30Ohm
- Innenleiter: AWG 28, Cu
- Isolation: 88A PVC
- RoHS-konform

- *USB 3.0 SUPER SPEED CABLE*
- *USB A plug > USB A jack*
- *Bit rate: up to 5Gbps*
- *Shielding: 3 times*
- *Insulation resistance: 300V 10MOhm*
- *Dielectric strength: AC 150V~/sec., 1mA*
- *Imprint: E324703 *
- AWM STYLE 2725 80°C 30V
- *Contact resistance: 30Ohm*
- *Inner conductor: AWG 28, Copper*
- *Insulation: 88A PVC*
- *RoHS compliant*

**Änderungen**

Änderungen		Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.: 28.11.2013	tf	USB 3.0 Verl AA SCHWARZ	
		gepr.: 28.11.2013	tf		
		Norm:		Zeichnungs-Nr.:	von
Änderungen vorbehalten / Subject to change					