





REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 07/11/05'		

NOTES:

- ELECTRICAL CHARACTERISTICS:
  - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
  - TEMPERATURE: -40°C~+105°C.
- PART NUMBER: DS1002-03
- PRODUCT NUMBER CODE:

DS1002-03 - X X X X

- Pin length  
1: 10.00mm
- Clip plating  
1: Tin 150u"  
2: Tin 200u"  
3: G/F  
4: Gold 3u"  
5: Gold 10u"  
6: Gold 15u"
- Pin plating  
1: Tin 150u"  
2: Tin 200u"  
3: G/F  
4: Gold 3u"  
5: Gold 10u"  
6: Gold 15u"
- No. of contacts  
1\*1 - 1\*40  
2\*1 - 2\*40
- Series No.  
DS1002-03

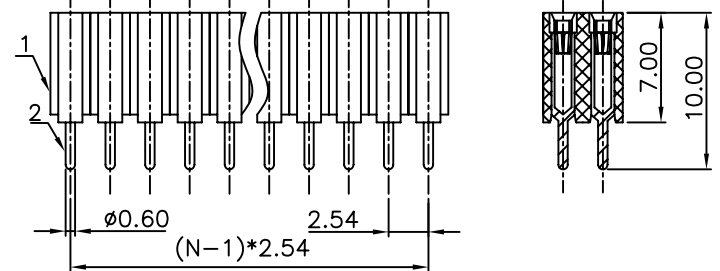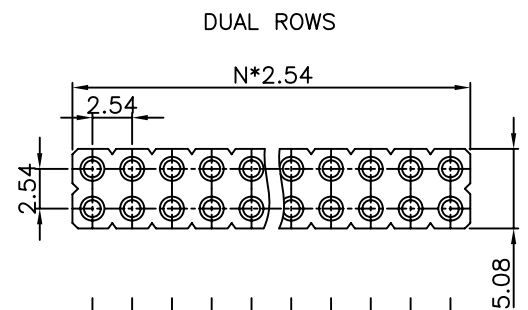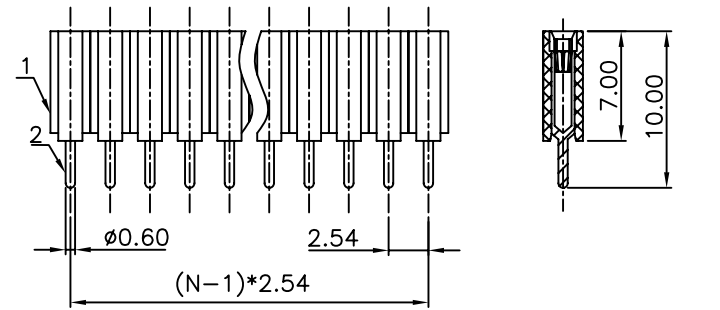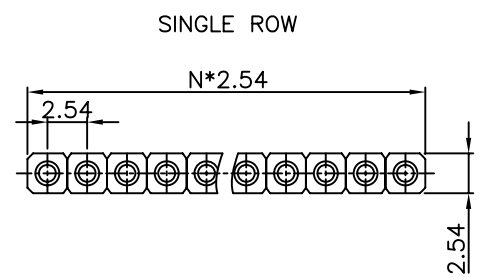

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	TITLE
UNITS	H:7.00mm SIP IC SOCKET (MACHINE PIN) PITCH 2.54mm
SHEET SIZE	SERIES DS1002-03 SERIES

2	CONTACT		COPPER ALLOY	GOLD PLATED	DRAWING TYPE	CUSTOMER	
1	HOUSING		THERMOPLASTIC	UL 94 V-0	SCALE	1:1	SHEET 10F1
ITEM	PART NAME	PART NO.	MATERILAS	FINISHED	DRAWING NO.	C-DS1002-03-XXXX	


**晨翔电子有限公司**  
**CONNFLY® CONNFLY ELECTRONIC CO., LTD**