
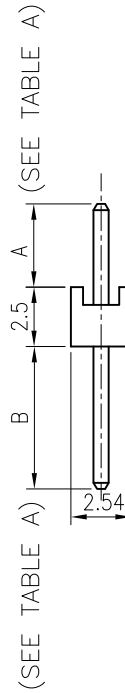


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 07/03/06'	~	LJC 04/04/06'
F	ADD DIM	LL 11/16/06'	~	LJC 11/05/06'
H	ADD DIM	LL 11/29/06'	~	LJC 11/29/06'
J	ADD DIM	YCH 09/12/07'	~	LJC 09/24/07'
K	ADD DIM	YCH 09/12/07'	~	LJC 01/27/10'
L	ADD DIM	DGQ 03/18/11'	~	LJC 01/27/10'
N	ADD DIM	JLZ 10/06/14'	~	

SINGLE ROW
N:NUMBER OF CONTACTS
A/B:CUSTOMER LENGTH AVAILABLE

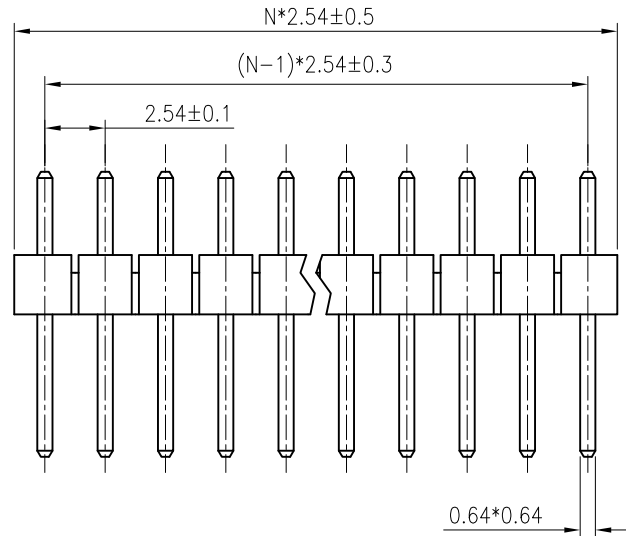

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.

- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$.

3. PRODUCT NUMBER CODE:

DS1021- X X X X - X
— PLATING LEVEL(FOR GOLD ONLY)
3A: LEVEL 3A B: LEVEL B
N: LEVEL N


TABLE A & DIM. TYPE

- 1: TYPE 1
2: TYPE 2
3: TYPE 3
4: TYPE 4 89: TYPE 89
5: TYPE 5 90: TYPE 90
6: TYPE 6 91: TYPE 91
7: TYPE 7 92: TYPE 92
8: TYPE 8
9: TYPE 9

CONTACT PLATING
F1: FULL GOLD FLASH
6: FULL TIN

MOUNTING TYPE
S: STRAIGHT TYPE

No. OF CONTACTS
1*1~1*40

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	⊕	TITLE	2.54mm PIN HEADER V/T TYPE	
X.	±0.60	X.	±5°	UNITS	mm	Single ROW		
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1021 SERIES	
.XX	±0.25	.XX	±2°	 晨翔电子有限公司 CONNFLY® CONNFLY ELECTRONIC CO., LTD				
DRAWING TYPE		CUSTOMER						
SCALE		SHEET 1 OF 2						
DRAWING NO.		C-DS1021-1*XXXX-X						

