
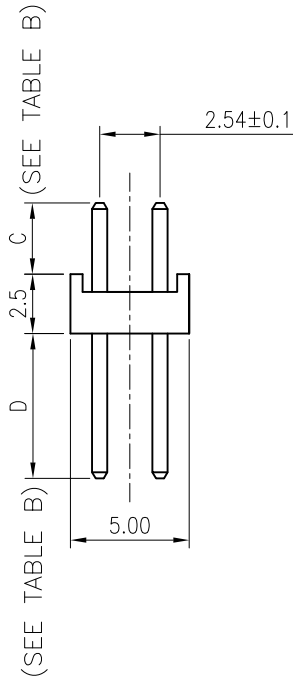


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 07/03/06'	~	LJC 04/04/06'
F	ADD DIM	LL 11/05/06'	~	LJC 11/05/06'
H	ADD DIM	LL 11/16/06'	~	LJC 11/16/06'
J	ADD DIM	YCH 09/12/07'	~	LJC 09/12/07'
K	ADD DIM	LBG 01/27/10'	~	LJC 01/27/10'
M	ADD P/N CODE	LJC 12/08/13'		

DUAL ROWS  
N:NUMBER OF CONTACTS/2  
C/D:CUSTOMER LENGTH AVAILABLE

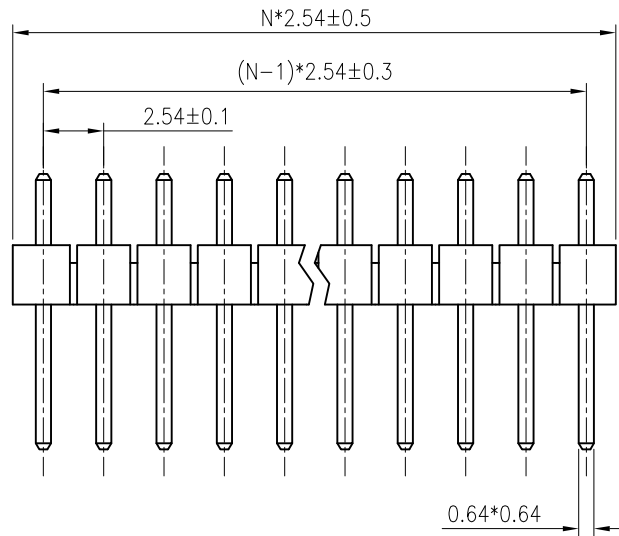

NOTES:

- ELECTRICAL CHARACTERISTICS:
  - CONTACT RESISTANCE: 20mΩ Max.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
  - TEMPERATURE: -40°C~+105°C.
- PRODUCT NUMBER CODE:  
DS1021- X X X X - X  
PLATING LEVEL(FOR GOLD ONLY)  
3A: LEVEL 3A    B: LEVEL B  
N: LEVEL N  
TABLE A & DIM. TYPE  
1: TYPE 1  
2: TYPE 2  
3: TYPE 3  
4: TYPE 4    57: TYPE 57  
5: TYPE 5    48: TYPE 58  
6: TYPE 6    59: TYPE 59  
7: TYPE 7    60: TYPE 60  
8: TYPE 8  
9: TYPE 9  
CONTACT PLATING  
F1: FULL GOLD FLASH  
6: FULL TIN  
MOUNTING TYPE  
S: STRAIGHT TYPE  
No. OF CONTACTS  
2\*1~2\*40

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	2.54mm PIN HEADER V/T TYPE
X.	±0.60	X.	±5°	UNITS	mm	2 ROWS	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1021 SERIES
.XX	±0.25	.XX	±2°	<b>晨翔电子有限公司</b> <b>CONNFLY® CONNFLY ELECTRONIC CO., LTD</b>			
DRAWING TYPE		CUSTOMER					
SCALE		SHEET 1 OF 2					
DRAWING NO.		C-DS1021-2*XXXX-X					

