
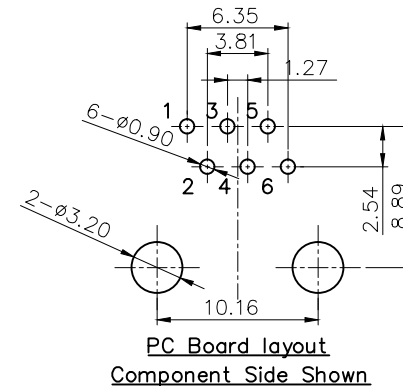
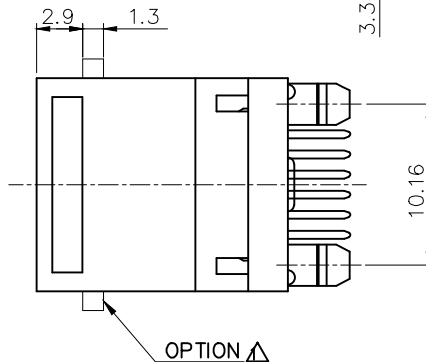
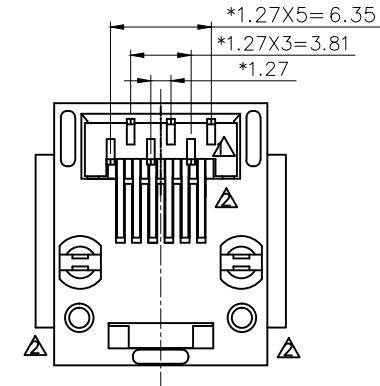
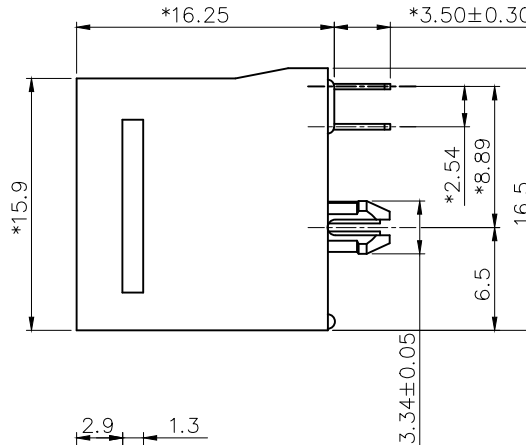


RoHS
THIS IS A RoHS
COMPLIANT
COMPONENT/
PRODUCT.

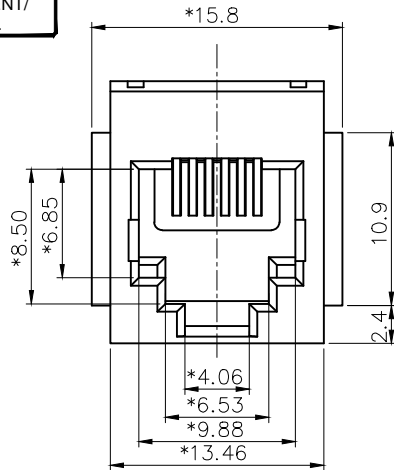

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS MIN.
2. CURRENT RATING : 1.5 AMP MIN.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 750 VAC RMS 50Hz, 1MIN.

MECHANICAL:

1. HOUSING&INSERT MATERIAL : HIGH TEMP. UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35 mm
3. PLATING : GOLD PLATING OVER NICKEL.
PLATING Au 3u"~50u" FOR "B" AREA
4. OPERATING LIFE : 1000 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.


ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
2. OPERATION: -40°C TO +85°C.

MATES WITH MODULAR PLUG CONFORMING TO TIA-1096-A.

ORDERING INFORMATION:

PART NUMBER	PRODUCT CODE	CONFIGURATION
325I-0024-01	RJJU-66-I20I-EIV-088	6U" GOLD PLATING, WITH PANEL STOP, 6P6C
325I-0024-02	RJJU-66-I206-EIV-088	6U" GOLD PLATING, WITHOUT PANEL STOP, 6P6C
325I-0024-03	RJJU-64-I210-EIV-088	6U" GOLD PLATING, WITH PANEL STOP, 6P4C
325I-0024-04	RJJU-64-I207-EIV-088	6U" GOLD PLATING, WITHOUT PANEL STOP, 6P4C
325I-0024-05	RJJU-66-I40I-EIV-088	30U" GOLD PLATING, WITH PANEL STOP, 6P6C
325I-0024-06	RJJU-66-I406-EIV-088	30U" GOLD PLATING, WITHOUT PANEL STOP, 6P6C
325I-0024-07	RJJU-64-I410-EIV-088	30U" GOLD PLATING, WITH PANEL STOP, 6P4C
325I-0024-08	RJJU-64-I407-EIV-088	30U" GOLD PLATING, WITHOUT PANEL STOP, 6P4C

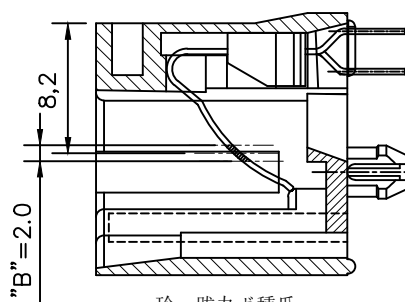

UL UL RECOGNIZED - FILE #E465899

MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE
△ X1	0000000	ADD NEW P/N	DORIS	041816'
△ X1	0000000	ADD NEW P/N	MORGAN	011015'
△ X1	0000000	ADD NEW P/N	MORGAN	011015'
△ X1	0000000	ADD NEW P/N	DORIS	091914'
△ X1	0000000	ADD NEW P/N	DORIS	081414'
△ X1	0000000	ADD NEW P/N	DORIS	061814'
△ X1	0000000	ADD NEW P/N	DORIS	051314'
△ X2	0000000	ADD NEW P/N	DORIS	032014'
△ X3	0000000	ADD NEW P/N	DORIS	010214'
△ X2	0000000	ADD NEW P/N	DORIS	121313'
△ X0	0000000	NEW DESIGN	DORIS	111213'

UNLESS OTHERWISE SPECIFIED TOLERANCE		SCALE	CHECKED
Dimension Range	Tolerance	3/1	
X.X	±0.20	UNIT	APPROVED
X.XX	±0.15	mm	
X.XXX	±0.10	SIZE	A3
ANGLE	±5°	SHEET	1/1
Material/Plated/Notes		NAME	
SEE NOTE		TOP ENTRY PCB JACK	
PART NO.		REV.	
SEE NOTE		10	
Tooling No.		DOC. NO.	