

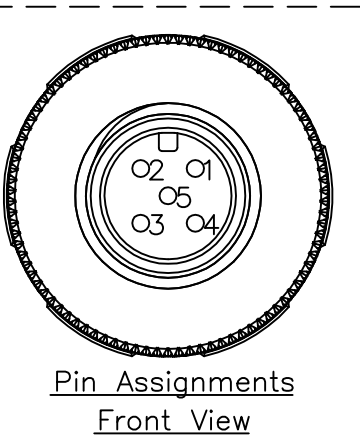
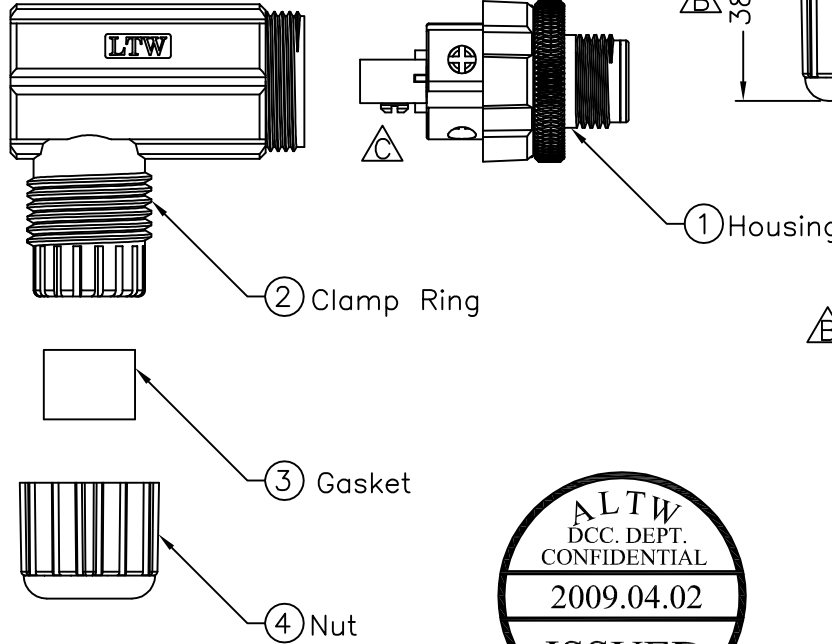
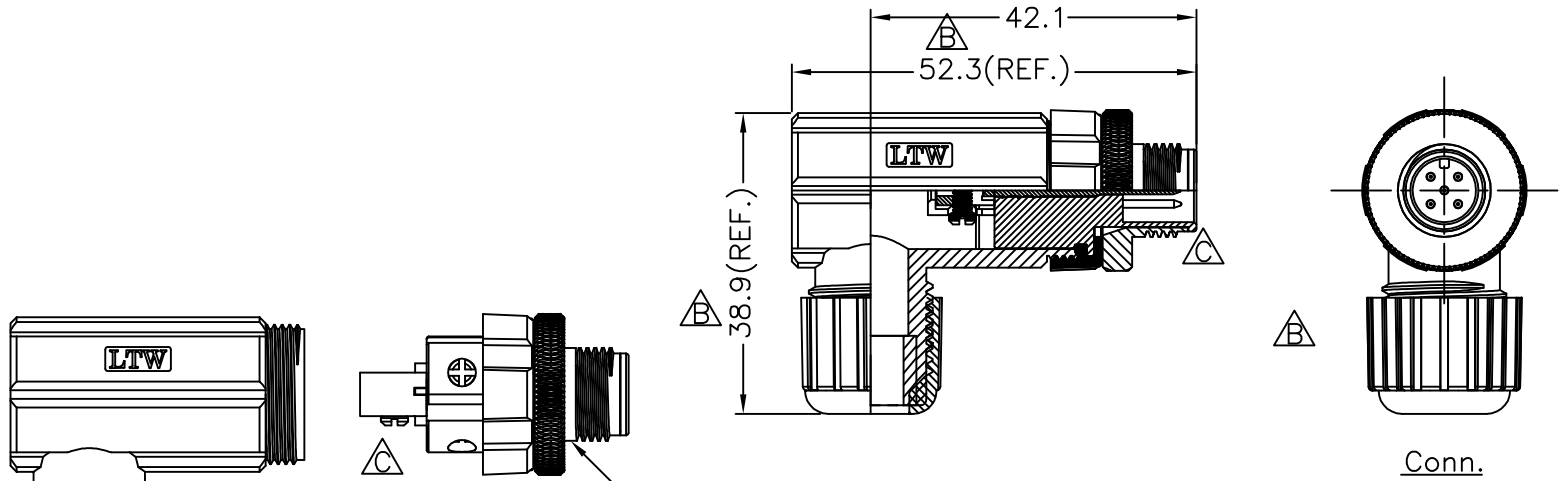


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LF3-6C0091	2006/11/22	Cloud	Modify the Note and dimension.
C	LEN-940017	2009/03/09	Prune	Change The View



- Note:**
- * Waterproof Rate : IP67
 - * Connector:Black,Nylon+GF
 - * Male Pin:Copper Alloy,Gold Plated
 - * O-Ring:Black,EPDM.
 - * Holder:Black,Nylon+GF
 - * Insulator:Black,PVC
 - * Clamp Ring:Black,Nylon 66.
 - * Gasket:Black,EPDM.
 - * Sealing Nut:Black,Nylon 66.
 - * Screw Nut:Copper Alloy,Nickel Plated
 - * Seals For Cable OD $\phi 4.5\text{mm} \sim \phi 6.0\text{mm}$
 - * Temperature Range: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$.



UNIT:mm	
TOLERANCE	
.X	± 0.25
.XX	± 0.1
.XXX	± 0.05
ANGLES	$\pm 1^{\circ}$

TITLE		M12	
Ass'y Screw 5P M Conn M Pin			
SCALE	Free	SHEET	1 OF 1
REV.	C	SIZE	A4
© :Inspection Item			

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	12-05BMMB-SR7001	DRAWN BY	Prune	DATE	2009/03/09
DWG NO	12-05BMMB-SR7001	CHECKED BY	Zhao Rong Fu	DATE	2009/03/10
CUSTOMER	ALTW	APPROVED BY	Luke	DATE	2009/03/26

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.