



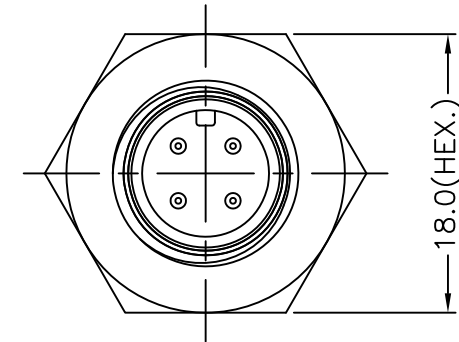
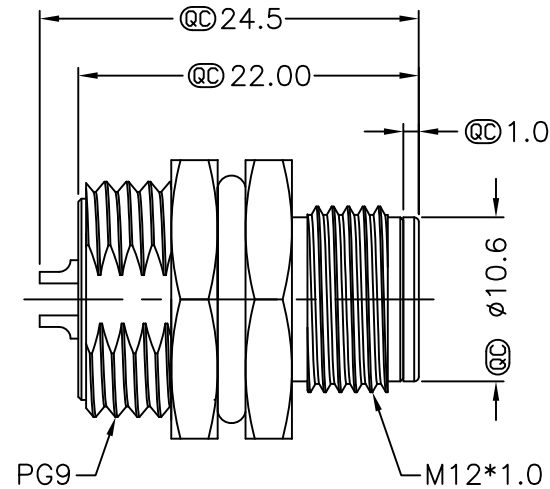


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-7A0019	2007/09/29	Myrdal	Added Note
C	LEN-850065	2008/04/23	Zhang Jin	Change View.

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY LTW.

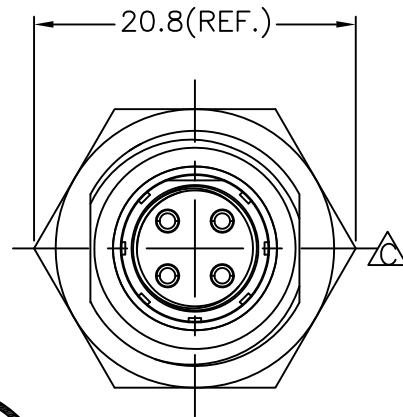


Pin Assignments
Front View



Recommended Panel Cut-Out

With Liquid Glue

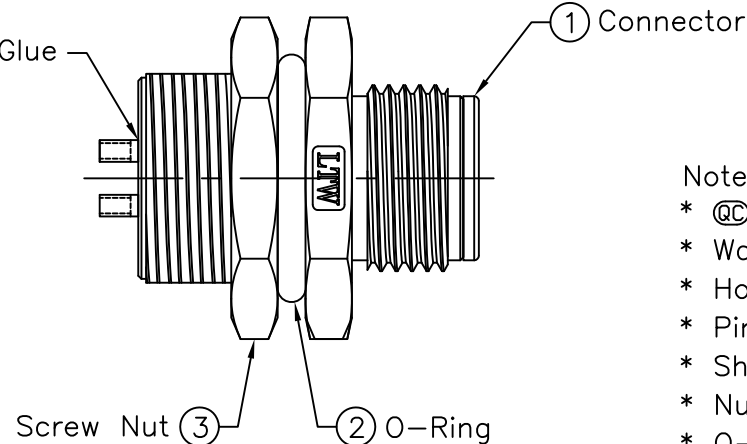

Note:

- * @C Important Dimension.
- * Waterproof Rate: IP68
- * Housing: Black, Nylon+GF
- * Pin: Copper Alloy, Gold Plated
- * Shield: Zinc Alloy, Nickel Plated
- * Nut: Zinc Alloy, Nickel Plated
- * O-Ring: Black, EPDM
- * For Panel Thickness Max 4.5mm
- * Nut Torque: 4-6 kgf.cm



UNIT:mm		TITLE	M12 Conn
TOLERANCE		Panel Screw 4Pin M Conn M Pin	
.X	±0.25	SCALE	Free
.XX	±0.1	SHEET	1 OF 1
.XXX	±0.05	REV.	C
ANGLES	±1°	SIZE	A4
		@C	:Inspection Item

LTW
亮泰企業股份有限公司

ITEM NO	LTW12-04PMMS-SH8001	DRAWN BY	Zhang Jin	DATE	2008/04/23
DWG NO	LTW12-04PMMS-SH8001	CHECKED BY	Ling	DATE	2008/04/25
CUSTOMER		APPROVED BY	Win	DATE	2008/04/25