



双刀波动开关

Double-poles Rocker Switch

RS-2 Series

双刀带灯波动开关


Double-poles Illuminated Rocker Switch

RS-2 Series



### 型号说明 Ordering Information

IRS-201-1A3D-R/B

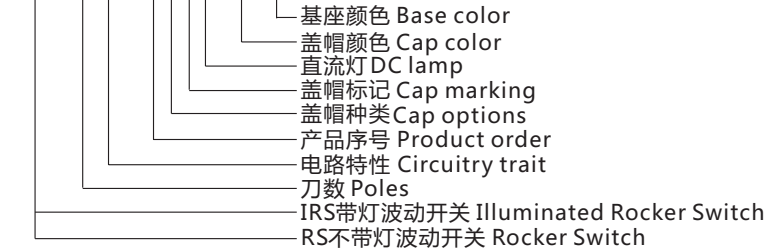

### 技术特性 Specification

- 1.规格 Rating:20A 125VAC;15A 250VAC;35A 12VDC
- 2.接触电阻 Contact Resistance:35mΩ max
- 3.绝缘电阻 Insulation Resistance:500VDC 100MΩ min
- 4.耐电压 Dielectric Strength:1500VAC, 1Minute
- 5.操作温度 Operating Temperature:-25°C ~ +85°C
- 6.电气寿命 Electrical Life:10,000 Cycles

### 电路特性 Circuitry trait


01	ON	-	OFF
02	ON	-	ON
11	(ON)	-	OFF
03	ON	OFF	ON

( ):回弹指示 Indicates Momentary


### 盖帽颜色Cap color 基座颜色Base color 防水罩 Water proof cap

黑 Black (B)	白 White (W)
红 Red (R)	黄 Yellow (Y)
绿 Green (G)	蓝 Blue (BL)
桔黄 Orange (O)	灰 Gray (GR)


黑 Black (B)
白 White (W)
灰 Gray (GR)

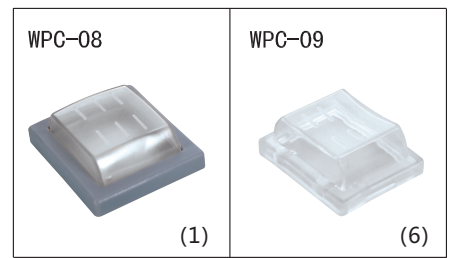


### 盖帽种类 Cap options

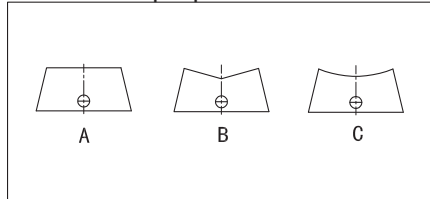


### 盖帽标记 Cap marking

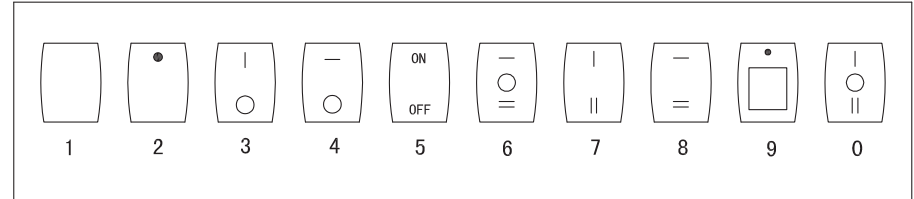

IRS-202-1C ON-ON  
 IRS-203-1C ON-OFF-ON  
 RS-202-1C ON-ON  
 RS-203-1C ON-OFF-ON  
 DPDT 6P

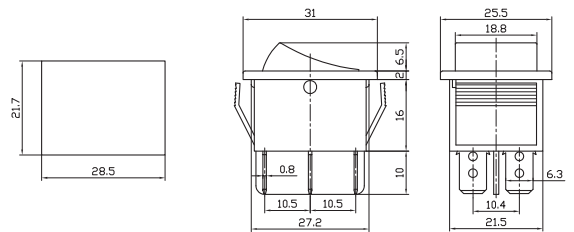

IRS-201-3C ON-OFF  
 RS-201-3C ON-OFF  
 RS-211-3C (ON)-OFF  
 DPST 4P

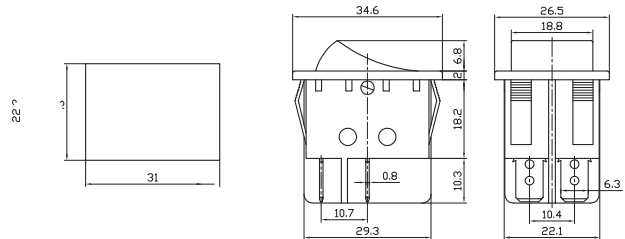

IRS-2101-3C ON-OFF  
 DPST 6P

