


- ⊙  $\Phi$  19mm Diameter
- ⊙ Switch Rating: 2A/36VDC
- ⊙ Contact Configuration: 1NO
- ⊙ Operation Type: Momentary
- ⊙ The Front Shape: Flat round
- ⊙ The Crust Material: (⊙): Stainless steel(S)/  
Nickel plated Brass(N)/Black anodized aluminium alloy(A)
- ⊙ IP Degree: IP65,IK09

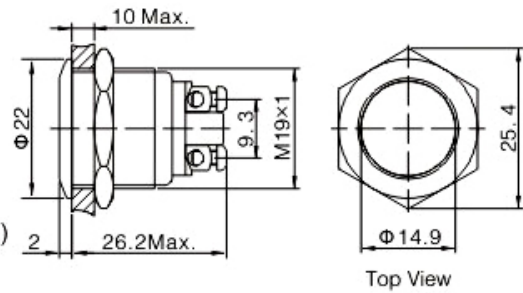

<b>GQ19F-10/⊙</b>		<b>Material</b>	<b>Button</b>	Stainless steel		
			<b>Terminal Type</b>	Screw Terminal	<b>Operation Pressure</b>	About 4N
			<b>Switching</b>	x(double-break slow-motion contact))	<b>Operation Travel</b>	About 2.5mm
<b>Panel Thickness</b>	1 ~ 6mm					
<b>Torque</b>	0.8Nm					
<b>Mechanical Life</b>	1,000,000 cycles					
<b>Electrical Life</b>	200,000 cycles	<b>RoHS</b>		Made to order		