




PTF11A



PTF11A






Specification

Rated load	Current / Voltage	A/VAC	10/300
Dielectric strength	Between coil and contact	V/S	2000
	Between contacts	V/S	2000
External connection wire	AWG/mm ²	20-16/0.5-1.5	
Screw torque	Nm	0.7	
Terminal protection degree			


Matched relay

Socket	Relay model	Metal Clip	Module	DIN rail
PTF11A	LY3	K-35S		

Outline dimension, Wiring diagram

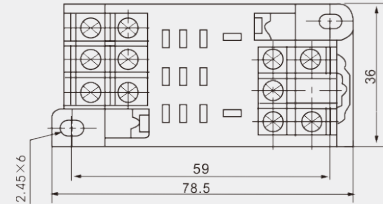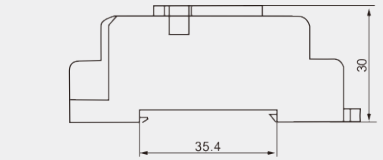

PTF11A-E



PTF11A-E



Specification

Rated load	Current / Voltage	A/VAC	10/300
Dielectric strength	Between coil and contact	V/S	2000
	Between contacts	V/S	2000
External connection wire	AWG/mm ²	20-16/0.5-1.5	
Screw torque	Nm	0.7	
Terminal protection degree			IP20

Matched relay

Socket	Relay model	Metal Clip	Module	DIN rail
PTF11A-E	LY3	K-35S		

Outline dimension, Wiring diagram

