




PTF08A



PTF08A






Specification

Rated load	Current / Voltage	A/VAC	10/300
Dielectric strength	Between coil and contact	V/S	2000
	Between contacts	V/S	2000
External connection wire	AWG/mm ²	20-16/0.5-1.5	
Screw torque	Nm	0.7	
Terminal protection degree			


Matched relay

Socket	Relay model	Metal Clip	Module	DIN rail
PTF08A	LY1	K-35S		
	LY2			
	56.02			
	58.02			
	JQX-13F 2Z 10A			

Outline dimension, Wiring diagram

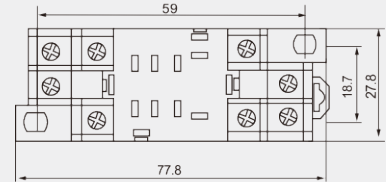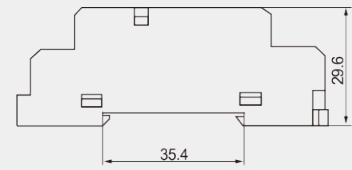

PTF08A-E



PTF08A-E



Specification

Rated load	Current / Voltage	A/VAC	10/300
Dielectric strength	Between coil and contact	V/S	2000
	Between contacts	V/S	2000
External connection wire	AWG/mm ²	20-16/0.5-1.5	
Screw torque	Nm	0.7	
Terminal protection degree			IP20

Matched relay

Socket	Relay model	Metal Clip	Module	DIN rail
PTF08A-E	LY1	K-35S		
	LY2			
	56.02			
	58.02			
	JQX-13F 2Z 10A			

Outline dimension, Wiring diagram

