
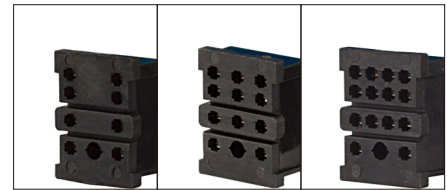


PY-08A

PT-08A



PY-08A

PY-11A

PY-14A



Specification

Rated Load	Current / Voltage	A/VAC	10/300
Dielectric Strength	Between coil and contact	V/S	4000
	Between contacts	V/S	2000
External connection wire	AWG/mm ²		
Screw torque	Nm		
Terminal protection degree			

Matched relay

Socket	PY-08A	PY-11A	PY-14A	PT-08A	Metal clip
	MY2	MY3	MY4	JQX-13F 2Z 10A	
Relay Model	55.02		55.04		K-35T
	HH52P	HH53P	HH54P		
	JQX-13F 2Z 5A	JQX-13F 3Z 5A	JQX-13F 4Z 3A		

Outline dimension, Wiring diagram

