



Product information CA 6 LD

Industrial Connecting Solutions: Circular Connectors: MIL, DIN, Universal Connectors: Signal and Power (CA series): Cable socket and panel-mounted socket: CA 6 LD

<http://www.e-catalog.beldensolutions.com/link/57078-24228-256281-256284-24359-24360-36071/en/conf/ui/state>

Name CA 6 LD



Straight cable socket, integrated strain relief

Delivery informations

Availability available

Product description

Description Straight cable socket, integrated strain relief

Type CA 6 LD

Order No. 934 127-100

Number of contacts 6 + PE

Cable gland M 22x2

Cable diameter 6 mm to 12 mm

Conductor size max. 0.75 mm²

Housing Color black

Technical data

Pin dimensions 1.5 mm

Rated voltage AC/DC 250 V

Rated current 10 A AC/DC

Contact resistance <= 5 mOhm

Type of termination solder, concave pins

Material

Contact surface material Ag

Contact bearer material PA 66-GF 25

Housing material PA 66-GF 25

O-Ring NBR

Environmental conditions

Protection class (IEC 60529) IP 67

Pollution severity 3

Temperature range -40 °C to +90 °C

Inflammability class

Flammability, UL standard 94 V-0

Approvals

UL UL

VDE VDE

Packing unit


Packaging unit 100 pieces

Scope of delivery and accessories

Scope of delivery 1 cable socket, not assembled, assembly instructions

Accessories to order separately can be plugged into CA 6 LS, CA 6 GS; cap CA 00 SD 3, order no. 831 532-400

Picture
Drawing

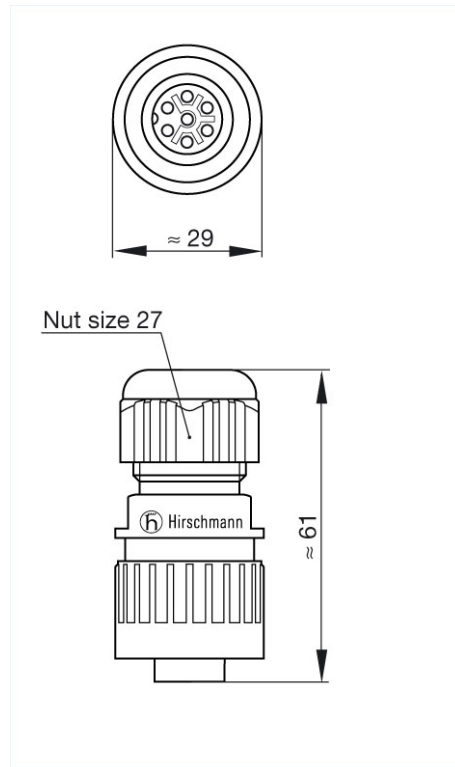

Belden Deutschland GmbH
Im Gewerbepark 2
58579 Schalksmühle
Germany
Phone: +49 7127/14-1806
E-Mail: icos-sales@belden.com

The information published in the websites has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price-related/commercial respect. The complete information and data were available on user documentation. Mandatory information can only be obtained by a concrete query.